
SYCAMORE SQUARE

1699-1735 SYCAMORE VIEW ROAD | MEMPHIS, TENNESSEE

ALTERNATIVE BUILDING DIVISION PLAN

R4.2-ALT | Halls north, stores south | Hall A enters from the north lot, Hall B from the east lot

01 FIXED SHELL | EVENT COMPLEX IN THE NORTH BLOCK

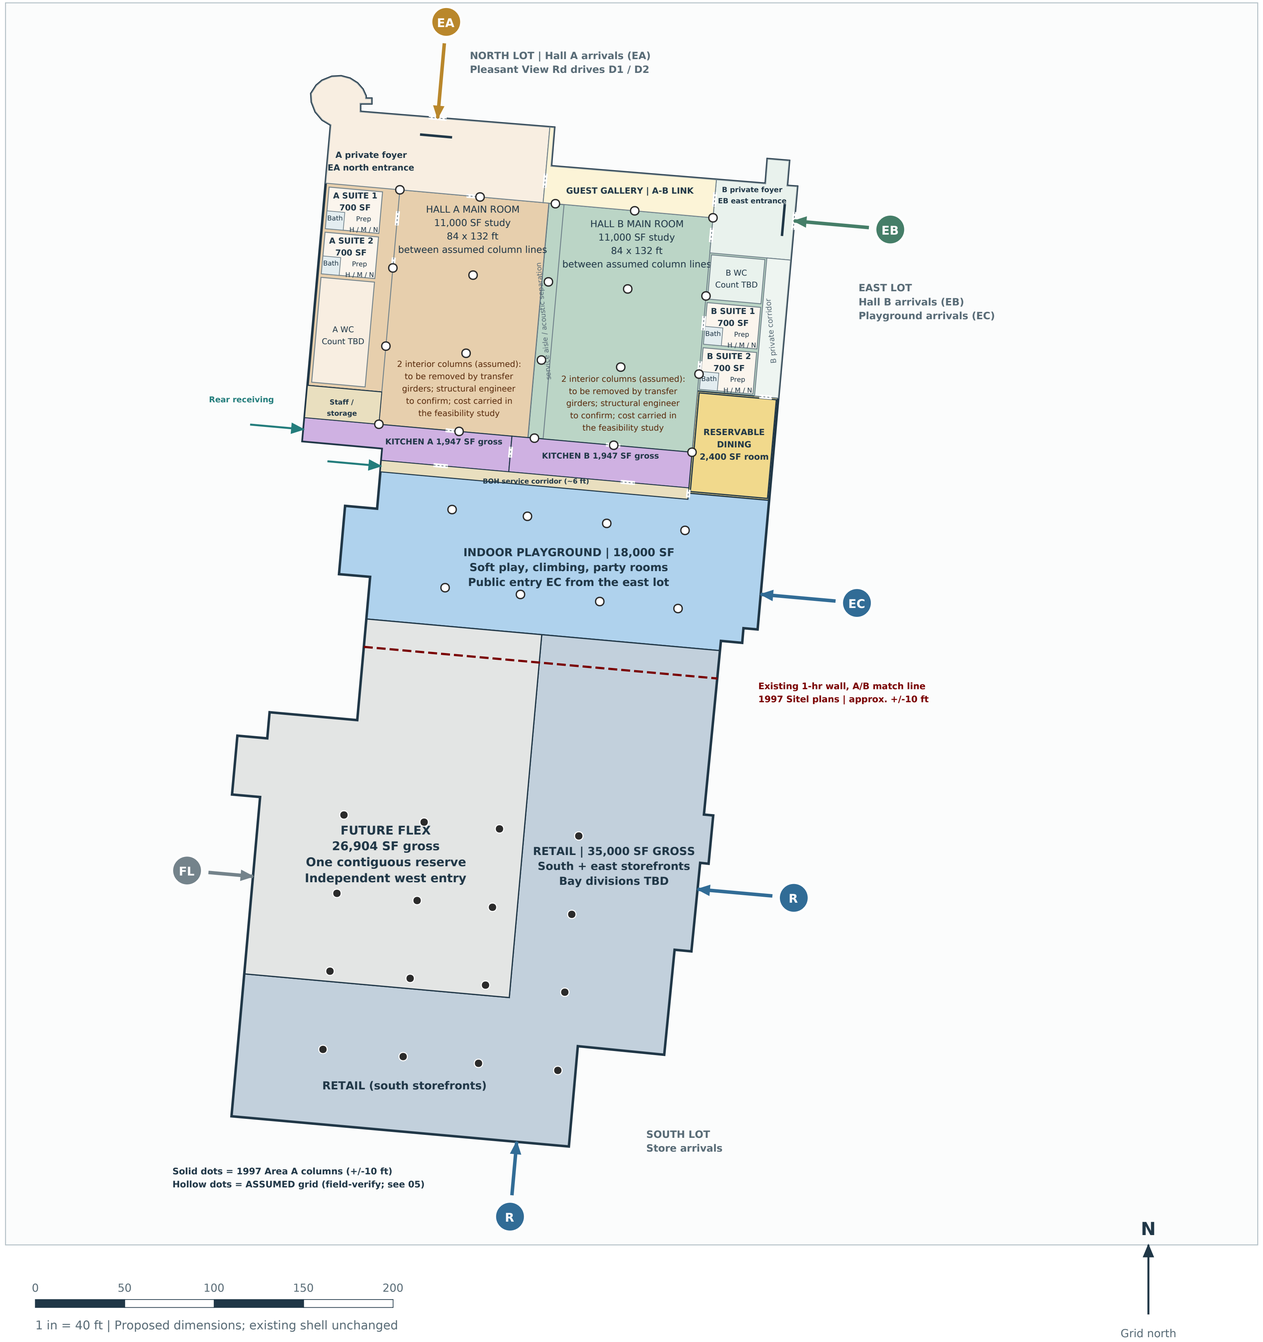

1 in = 40 ft. Comparison study only. Room dimensions and the north-block column grid are assumptions; retained outline is source geometry. Net areas and capacities are undetermined.

02 COMPLETE EXISTING-BUILDING FLOOR BUDGET | SAME AS R4.2

ID	Use	Drawn footprint SF	Allocated gross SF*
HA	Hall A suite	21,362	20,563
K	Two linked kitchen suites	4,046	3,895
S	Common service / support	1,849	1,779
D	Reservable dining + guest gallery	4,659	4,484
HB	Hall B suite	17,671	17,009
CH	Indoor playground	18,700	18,000
R	Retail storefront program (south + east)	36,361	35,000
FL	Future flex reserve	27,949	26,904

TOTAL: 127,634 SF allocated against the 132,596 SF source footprint, using the same proportional basis as R4.2. *Every gross allocation is identical to R4.2; only the locations change. Gross budgets are not measured net areas.

03 MAIN ROOMS AND SUPPORT | NO DOUBLE COUNTING

Component	Drawn room SF	Budget treatment / requirement
Hall A main room	11,000	84 x 132 ft between ASSUMED column lines; 2 interior columns (assumed), to be removed by transfer girders; structural engineer to confirm; cost carried in the feasibility study. Private foyer along the north wall; guests enter from the north lot (EA). Suites and WC on the west side with a private corridor.
Hall B main room	11,000	Same size and orientation, beside Hall A behind a ~9 ft service / acoustic aisle; 2 interior columns (assumed), to be removed by transfer girders; structural engineer to confirm; cost carried in the feasibility study. Private foyer, WC and suites in the east wing; guests enter from the east lot (EB).
Hall suites	700 each x 4	Two per hall inside the hall budgets; each includes a 100 SF full-bath reservation and hair / makeup / nail preparation.
Two kitchen suites	1,947 + 1,947 gross	One shallow band (~20 ft) along the south side of both halls, each dispatching into its own hall. Kitchen A has its own west door; Kitchen B receives through a ~6 ft service corridor from the existing west dock. Tighter than R4.2: food-service designer to confirm.
Dining + gallery	4,484 gross	2,400 SF reservable dining at the east end, served from the corridor and reached from the B side; 2,058 SF guest gallery along the north wall links the A and B foyers (controlled).
Service support	1,779 gross	Service corridor plus a staff / storage room on the west wall.

04 WHAT CHANGES FROM R4.2

01 The event complex moves to the north block and the stores move to the south part (Area A). Both halls now sit side by side; their arrivals are 207 ft apart on different façades and lots (R4.2: 121 ft; R4.1: 99 ft).

02 Retail gets the east and south faces (about 284 + 252 ft of exterior wall), nearest Summer Ave / US 70 and drive D4. Flex takes the west / rear of Area A with its own west entry.

03 The indoor playground (18,000 SF: soft play, climbing, party rooms) sits between the event block and the stores, entered from the east lot (EC). No hall adjoins it, so the private child room of R4.2 is not provided.

04 The 1-hr A/B wall falls about 16 ft inside the stores / flex block and could become their north demising line.

05 HOLDS BEFORE THIS OPTION CAN BE COMPARED ON COST

01 North of the A/B wall the column grid is NOT documented: the 1997 drawings cover only Area A in detail, and Area B notes 5 column covers without a usable grid. The hall rooms here assume the Area A grid continues; the count of columns to remove could differ.

02 The north block has no plumbing or wet-core information on the drawings received. Halls there need new restroom cores; the 1997 Area A cores would serve the stores instead.

03 The north lot and the Pleasant View Rd drives D1 / D2 need a stall count, turning check and a neighbour / late-night noise review before Hall A can rely on them.

R4.2-ALT | HALLS NORTH, STORES SOUTH | COMPARISON STUDY | 18 OCT 2026

Alternative layout on the R4.2 basis (recorded parcel lines). North-block columns are assumed; survey, title, interiors and approvals remain outstanding.

NOT FOR CONSTRUCTION, PERMIT, CONVEYANCE OR REPRESENTATION OF APPROVED USES.

ALT-1

36 x 24 in | Print at 100%


SYCAMORE SQUARE

1699-1735 SYCAMORE VIEW ROAD | MEMPHIS, TENNESSEE

ALTERNATIVE MASTER SITE PLAN

R4.2-ALT | Halls north (north + east lots), stores south (south + east lots) | Frontage fuel option unchanged

01 LAND USE AND ACCESS STRUCTURE

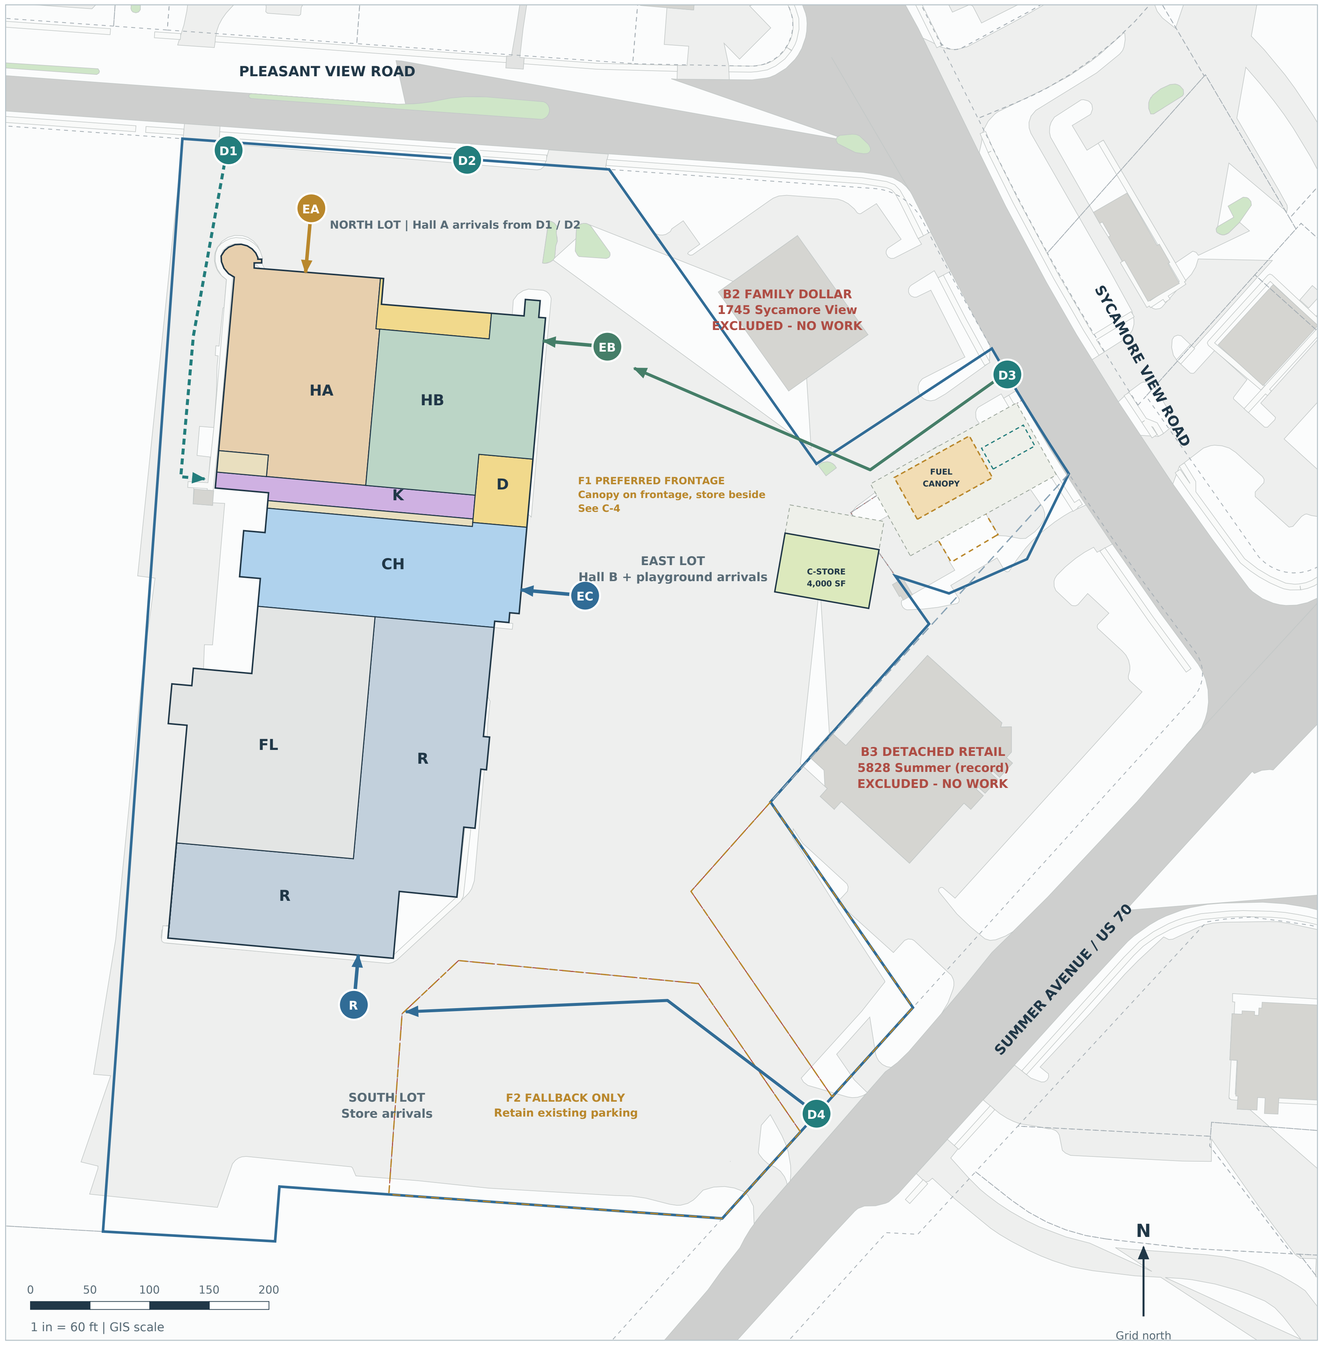

Existing geometry is unchanged from C-1. All proposed rooms, routes and the north-block column grid are assumptions for comparison with R4.2.

02 ALTERNATIVE LAYOUT AND ARRIVALS

01 Hall A guests arrive from Pleasant View Rd (drives D1 / D2) into a north lot and enter the north façade (EA). Hall B guests use the east lot from Sycamore View (D3) and enter the east façade (EB). The two doors are 207 ft apart on different streets.

02 Stores take the south and east faces of the old Area A, closest to Summer Ave / US 70 and drive D4; the south lot serves them. The indoor playground (EC) shares the east lot.

03 Catering and receiving keep to the west service drive: Kitchen A has its own west door and Kitchen B is served through a corridor from the existing west dock.

04 City flood layer overlap: halls 71% here versus 56% in R4.2; stores 59% versus 64%. The whole building is treated as one structure for flood rules either way.

05 All program areas, the frontage fuel test (F1 / F2) and the parcel basis are unchanged from R4.2.

03 ACCESS QUESTIONS THIS OPTION RAISES

Question	Why it matters
North lot capacity	Hall A would depend on the paving between the building and Pleasant View Rd. Count usable stalls, accessible spaces and a drop-off before relying on it.
Pleasant View Rd drives	D1 / D2 widths, sight lines and turning permissions for event peaks and late departures; confirm with the City.
Neighbours	The aerial shows homes and yards west of the site. Late-night event traffic on the Pleasant View side needs a noise and lighting review: verify.
Store visibility	South storefronts face the south lot toward Summer Ave; the pads at 5800 / 5810 Summer sit between. Check sign visibility from US 70.

04 RELEASE CONDITIONS

Everything in R4.2 C-2, plus: a measured survey of the north block (columns, clear heights, roof framing, utilities and any wet cores) before this option is priced; a north-lot parking and access plan; and the City's view of event traffic on Pleasant View Rd. The drawings do not establish a permit-ready development.

R4.2-ALT | HALLS NORTH, STORES SOUTH | COMPARISON STUDY | 18 OCT 2026

Alternative layout on the R4.2 basis (recorded parcel lines). North-block columns are assumed; survey, title, interiors and approvals remain outstanding.

NOT FOR CONSTRUCTION, PERMIT, CONVEYANCE OR REPRESENTATION OF APPROVED USES.

ALT-2

36 x 24 in | Print at 100%


SYCAMORE SQUARE

1699-1735 SYCAMORE VIEW ROAD | MEMPHIS, TENNESSEE


LAYOUT COMPARISON | R4.2 VERSUS ALT

Same building, same program areas, same parcel basis | Which end should the halls take?

R4.2 | HALLS SOUTH (BASE)

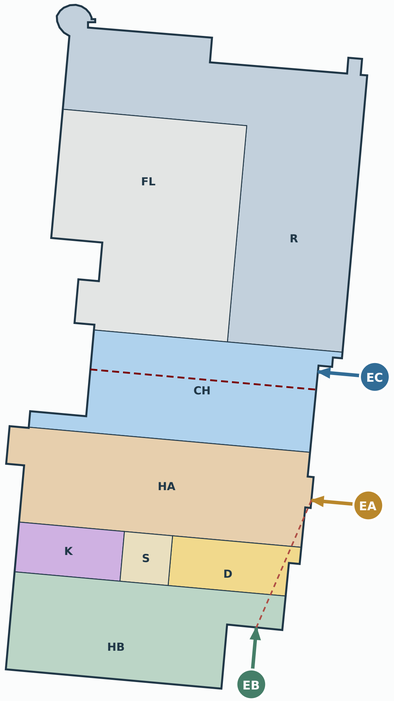

ALT | HALLS NORTH, STORES SOUTH

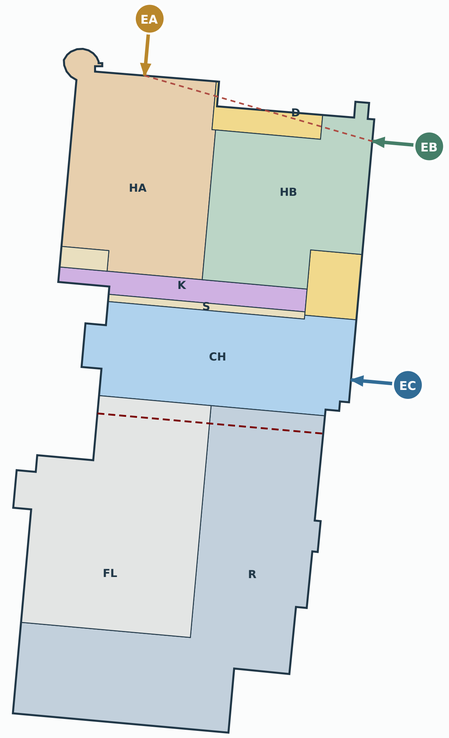

Red dashed line = straight-line distance between the two hall doors: R4.2 121 ft | ALT 207 ft.

- HA / HB Hall A / Hall B suites
- K kitchens S service D dining + gallery
- CH indoor playground (18,000 SF)
- R retail (35,000 SF) FL flex
- 1-hr A/B wall (1997 plans)

Both layouts use the same 127,634 SF allocations: halls 20,563 + 17,009, kitchens 3,895, dining + gallery 4,484, service 1,779, indoor playground 18,000, retail 35,000, flex 26,904. Thumbnails at 1 in = about 63 ft.

02 SIDE-BY-SIDE COMPARISON (COMPUTED FROM THE PLAN GEOMETRY)

Topic	R4.2 | halls south (base)	ALT | halls north
Hall entrances	EA on the east façade (east lot). EB on the south-facing wall of the SE corner step (south lot, drive D4).	EA on the north façade (north lot, Pleasant View Rd D1 / D2). EB on the east façade, north end (east lot, D3).
Independent arrivals	121 ft door to door (R4.1 was 99 ft). Different façades, neighbouring lots.	207 ft door to door. Different façades, lots and streets.
Retail frontage	North 276 ft + east 292 ft of exterior wall. Faces the main east lot toward Sycamore View / D3; the north face looks to Pleasant View Rd.	East 284 ft + south 252 ft. Nearest Summer Ave / US 70 and D4; the south face overlooks the south lot, with the Summer pads in between.
City flood layer overlap	Halls 56% (A 79%, B 28%); event complex 58%; retail 64%.	Halls 71% (A 56%, B 88%); event complex 73%; retail 59%.
Hall columns	2 interior per hall, located from the 1997 drawings (+/-10 ft); planned removal by transfer girders.	2 interior per hall on an ASSUMED grid. The north block is not covered by the 1997 drawings; the real count could differ. Survey first.
Kitchens and receiving	Two 1,947 SF kitchens in one structural bay between the halls; each has its own rear door on the Area A west wall.	Same areas in a ~20 ft band south of both halls. Kitchen A has a west door; Kitchen B receives via a ~6 ft corridor from the existing west dock.
Existing wet cores	Halls sit beside the 1997 Area A west-wall toilet cores and sprinkler room (reuse potential).	The Area A cores serve the stores; the halls need new restroom cores in an undocumented area.
Dining and A-B link	Dining + gallery sit between the two foyers.	Gallery along the north wall links the foyers; dining at the east end next to Kitchen B, reached from the B side.
Playground and child room	The indoor playground sits between Hall A and the stores; a private child room opens off Hall A.	The indoor playground sits between the event block and the stores; no hall adjoins it, so no private child room.
Neighbours and late traffic	Event arrivals from Sycamore View Rd and Summer Ave (commercial roads).	Hall A traffic uses Pleasant View Rd drives D1 / D2; homes and yards lie west of the site (aerial). Verify.
1-hr A/B wall	Inside the playground zone; can separate public play from party rooms.	About 16 ft inside the stores / flex block; could be their north demising line.

03 VERDICT IN PLAIN ENGLISH

01 Independent arrivals (two events at once): ALT is better. The doors are 207 ft apart on different streets, versus 121 ft in R4.2.

02 Retail: roughly even. ALT puts the shops nearest Summer Ave / US 70; R4.2 puts them on the bigger east lot facing Sycamore View.

03 Flood exposure: R4.2 is better for the halls (56% of hall area in the city flood layer versus 71%); ALT is slightly better for the stores (59% versus 64%).

04 Certainty: R4.2 is better. Its halls sit on columns measured from the 1997 drawings; ALT's north block has no drawings, so its column count, utilities and parking are unknown until surveyed.

05 Overall: keep R4.2 as the base. Carry ALT as a live option and decide after a north-block survey and a north-lot parking count.

04 WHAT IT WOULD TAKE TO CHOOSE ALT

01 Measured survey of the north block: columns, clear heights, roof framing, utilities and any wet cores. The 1997 drawings do not cover it.

02 North-lot stall count, accessible parking and drop-off, plus the City's view of event traffic on Pleasant View Rd drives D1 / D2.

03 Re-price the column removal, restroom cores and kitchen services for the north block, then rerun the feasibility numbers with the same program areas.

Computed with the same city flood layer, shell outline and door points used on the plan sheets. Straight-line distances, not walking routes. Comparison study, not an approved layout.

R4.2-ALT | HALLS NORTH, STORES SOUTH | COMPARISON STUDY | 18 OCT 2026

Alternative layout on the R4.2 basis (recorded parcel lines). North-block columns are assumed; survey, title, interiors and approvals remain outstanding.

NOT FOR CONSTRUCTION, PERMIT, CONVEYANCE OR REPRESENTATION OF APPROVED USES.

ALT-3

36 x 24 in | Print at 100%