
SYCAMORE SQUARE

1699-1735 SYCAMORE VIEW ROAD | MEMPHIS, TENNESSEE

EXISTING CONDITIONS AND PARCEL VERIFICATION

R4.1 | Outline follows the recorded lines of the four parcels being bought

01 GIS / SOURCE VECTOR BASELINE

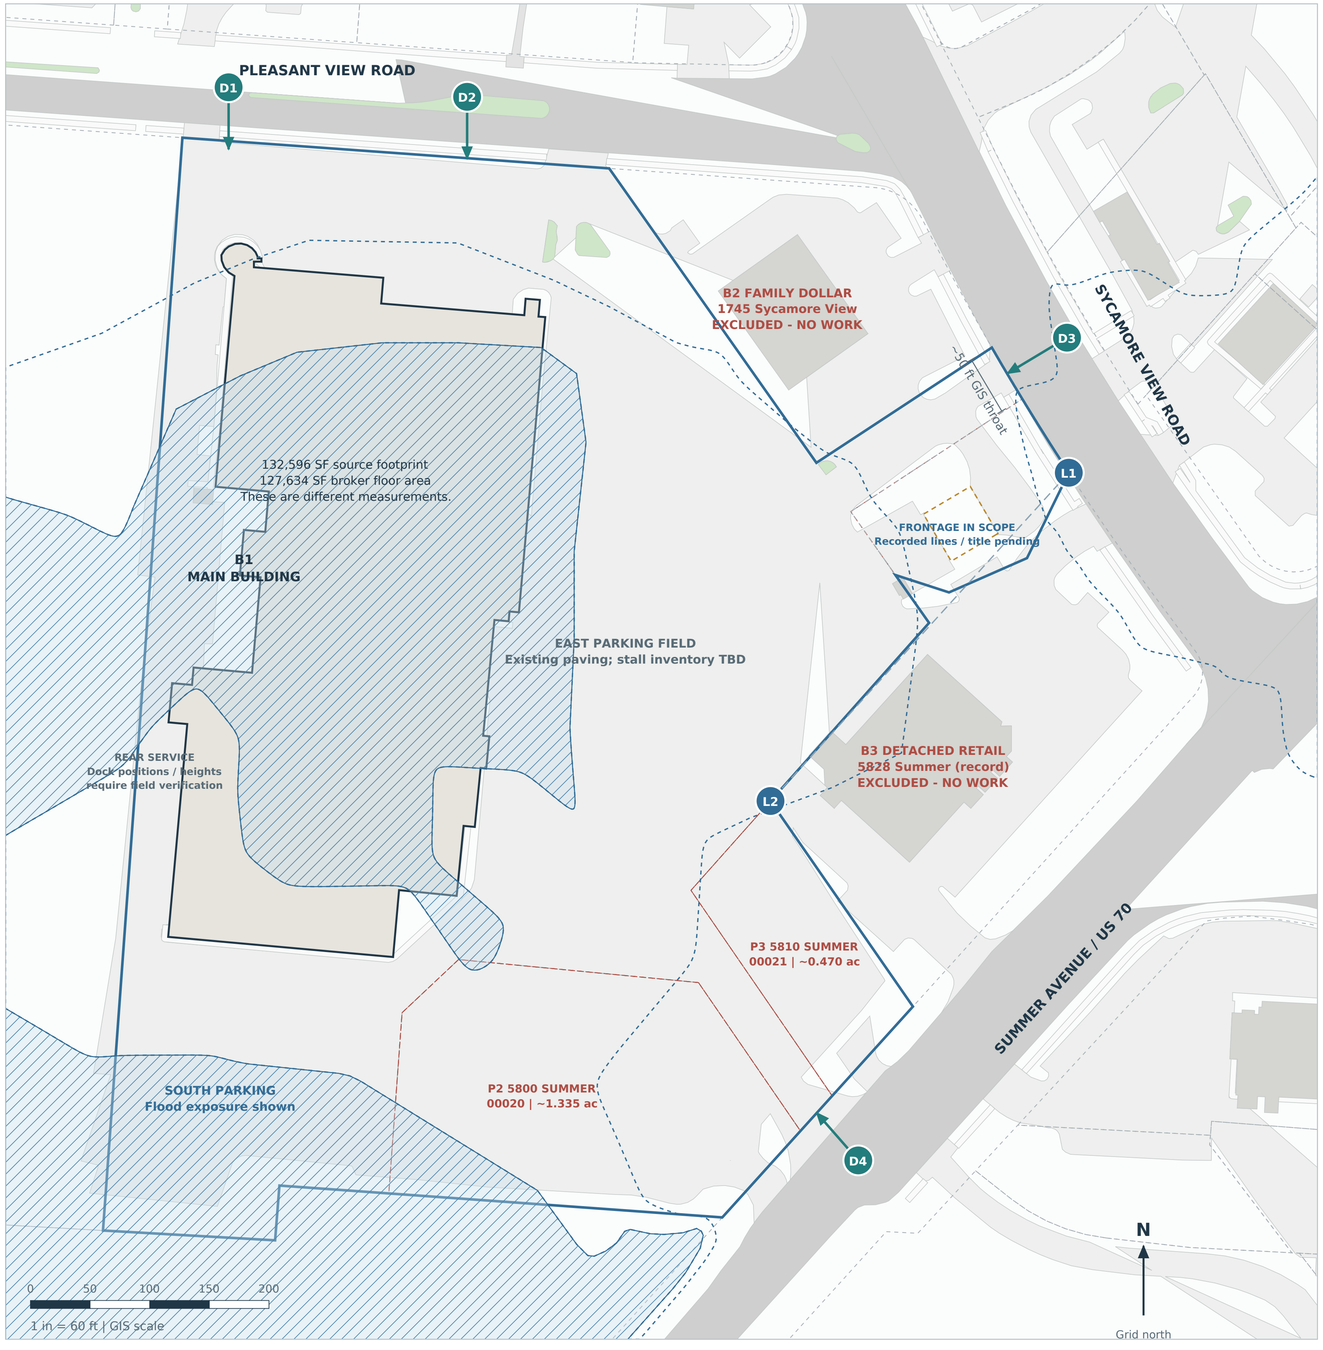

Sources: S1 supplied study; S2 supplied aerial; S3 city parcel layer; S4 city footprints / roads; S5 city flood layer; S10 1997 Sitel plans; S11 county planimetrics. Full source register is in the editable package.

02 ORIGINAL BROKER AERIAL | OBLIQUE / NOT TO SCALE



Unaltered photograph, displayed as a crop. B2 is Family Dollar. B3 is the detached brick retail building; its association with 5828 Summer is an image-to-map interpretation. L1-L2 is straight in this source. The plans do not use that straight edge: the blue outline follows the recorded parcel lines, pending survey.

03 PARCEL RECONCILIATION

GIS parcel	Area (GIS)	Status / verification
088066 00027	9.694 ac	Main building and parking. Acquisition scope assumed from study; title not verified.
088066 00020	1.335 ac	5800 Summer pad / parking. Separate tax polygon corroborated.
088066 00021	0.470 ac	5810 Summer pad / parking. Separate tax polygon corroborated.
Three-parcel total	11.499 ac	Main building + two Summer pads.
Four-parcel total	11.880 ac	Adds the 1717 frontage. This is the planning outline. Broker states 11.72 ac; survey to reconcile.
00024 record	~0.381 ac	1717 frontage. In scope; full recorded polygon is used.
00025C / 00022C	No work	Family Dollar and detached brick retail remain excluded from proposed work.

04 WHAT IS CORROBORATED / WHAT REMAINS OPEN

01 R4.1: the outline now follows the recorded lines of the four parcels (11.880 ac including the 1717 frontage). The broker's straight L1-L2 line, kept as a thin dashed reference, would take ~1,089 SF of the 5828 Summer record, so it is not used. Survey and title confirm the final lines. [S2,S3]

02 City flood mapping overlaps ~74.1% of the retained footprint and ~3.98 acres of the three parcels. Current FEMA panel / LOMRs, BFE and floodway status remain a hold. [S1,S5]

03 R4 evidence: county planimetrics (2017 flight) record the dashed gold structure on the 1717 record as a 1981 quick-lube; current imagery shows no roof. 1997 Sitel plans (S10) give the Area A column grid and the A/B rated wall; see A-1.

04 Legend: blue solid = recorded lines of the four parcels being bought; thin dashed blue-gray = broker marketing line (reference only); dashed gray / red = individual tax records; blue hatch = city flood mapping; dashed gold = old 1717 structure. L1 / L2 mark the ends of the broker line.

R4.1 | RECORDED PARCEL LINES | 18 OCT 2026

GIS-based baseline; field survey, title, existing interiors and approvals remain outstanding.

NOT FOR CONSTRUCTION, PERMIT, CONVEYANCE OR REPRESENTATION OF APPROVED USES.


SYCAMORE SQUARE

1699-1735 SYCAMORE VIEW ROAD | MEMPHIS, TENNESSEE

PROPOSED MASTER SITE PLAN

R4 | 11,000 SF main rooms on the 1997 column grid; twin kitchens; frontage canopy + adjoining C-store

01 LAND USE AND ACCESS STRUCTURE

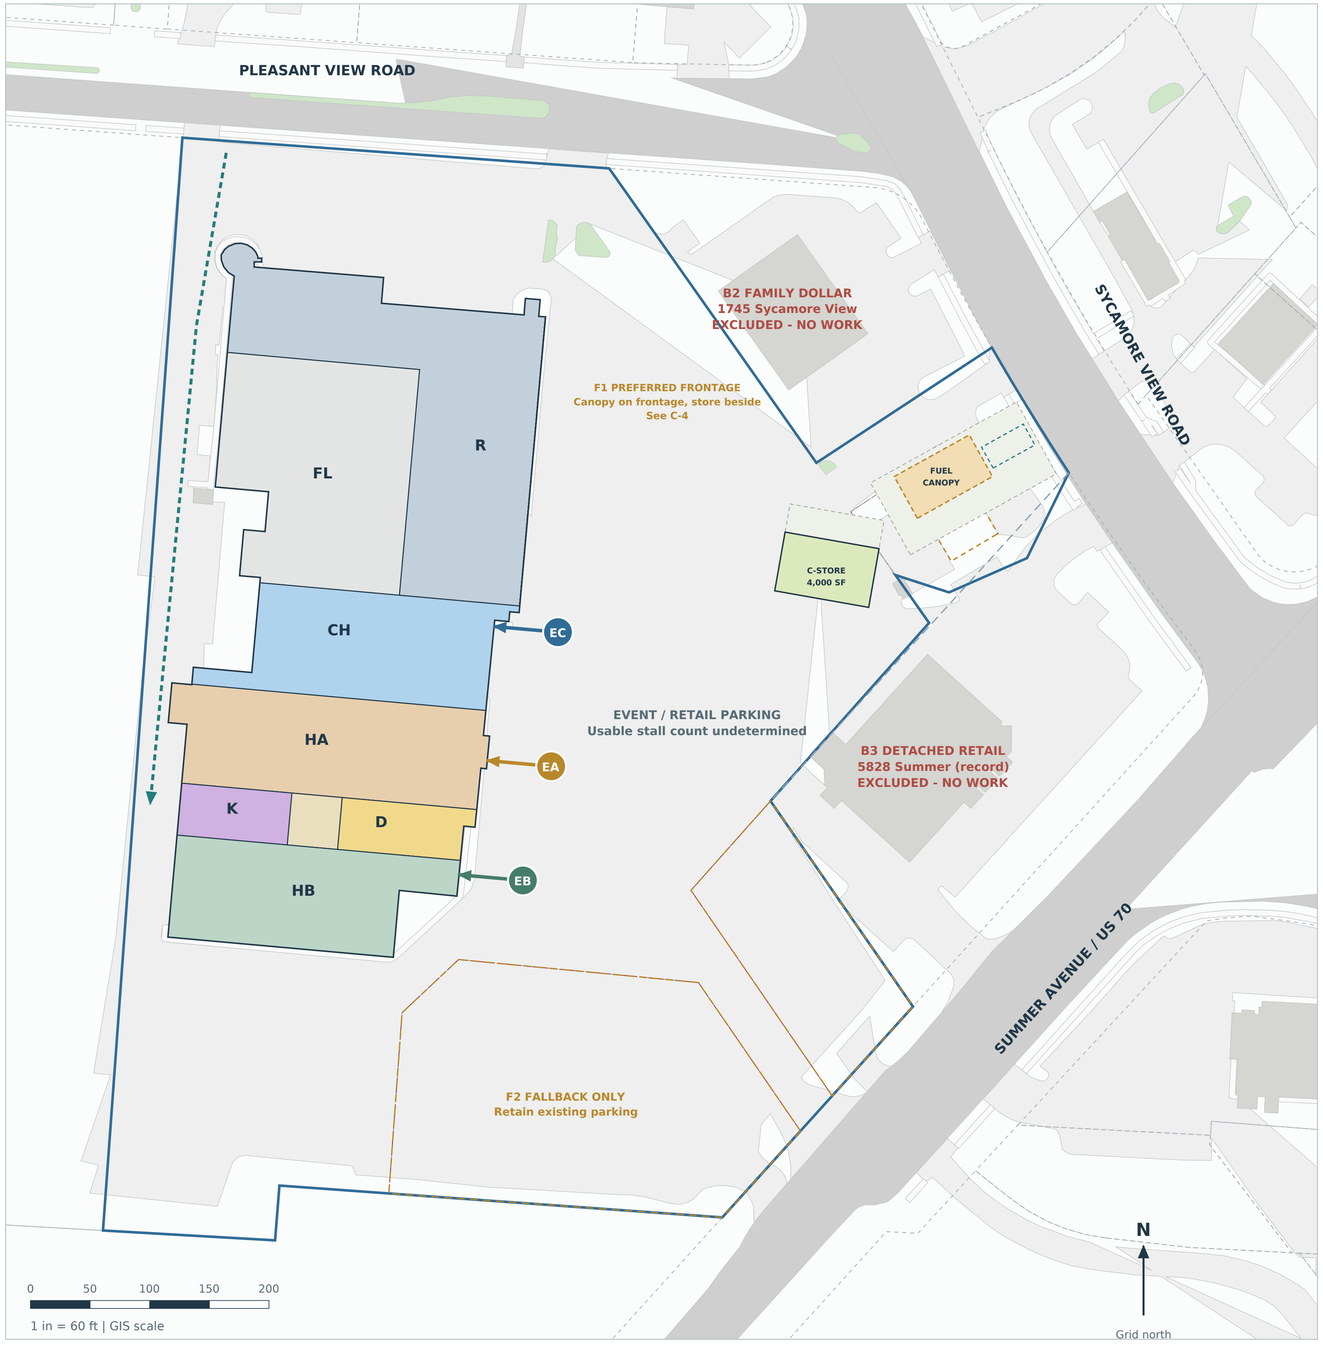

Existing geometry is unchanged from C-1. All proposed rooms, modules, dimensions and routes are preliminary assumptions. See C-4 and the source register.

02 R4 PROGRAM CHANGES

01 NEW EVIDENCE: the user-supplied 1997 Sitel plans (A2.1 / A2.2) show Area A columns on a ~44 ft grid. R4 snaps the event complex to that grid: each 11,000 SF main room (132 x 83 ft) spans three bays with 2 interior columns instead of the ~4 the draft rooms enclosed. Positions are scaled from the drawings (+/-10 ft) and need field measurement.

02 Each hall keeps two wedding-party / family suites (700 SF study block each, ensuite full-bath reservation and family hair / makeup / nail preparation) along the rear wall, with a private corridor into its own room. Four suites total; event amenities, not retail salons.

03 The central band is exactly one structural bay. Kitchen A (1,947 SF) and Kitchen B (1,947 SF) sit on the rear side with their own receiving and a direct dispatch wall into their own hall; a controlled door links them for one caterer.

04 Reservable dining (2,400 SF room) and an A-B guest gallery fill the parking side of that band (4,484 SF gross together). Hall foyers stay on the east face. Hall suites total A 20,563 / B 17,009 SF gross.

05 Retail 35,000 SF and recreation 18,000 SF are unchanged. Flex absorbs the difference: 26,904 SF (draft 31,634). The existing 1-hr A/B wall falls inside the play zone. The 4,000 SF C-store is new construction outside the existing-building total.

03 FRONTAGE FUEL + STORE | CONDITIONAL FIRST OPTION

Element	R4 test	Unresolved requirement
F1 frontage	72 x 40 ft canopy (3 islands / 6 fueling positions) and 40 x 20 ft tank reservation on the frontage, fronting the existing throat drive; 80 x 50 ft store beside it, 41 ft from the canopy. All are assumptions.	C-4 tests containment and clearances to the access reservation, neighbors and the old 1717 pad. It does not prove setbacks, queues, tank sizing, tanker turning or zoning approval.
Existing access	Reserve a conceptual 30 ft connection through the existing frontage throat toward the main parking.	Width is a planning assumption, not a verified curb dimension or legal minimum. Access rights and emergency clearance must be established.
Adjacent properties	Family Dollar and detached brick retail remain unchanged and excluded from work.	Frontage is in the acquisition scope. Plans follow the recorded lines; the broker line is not used where it crosses the 5828 record.
Fallback F2	5800 Summer: a 4,000 SF store + 6-position canopy fits as ONE integrated block, outside the city AE layer, with the Summer drive kept clear (see C-4 note).	Better station geometry, weaker traffic road. Uses pad / event parking. Never count F1 and F2, or an in-building store, as the same project.

04 RELEASE CONDITIONS

Survey / title and access reconciliation; measured interiors and structure; effective FEMA / floodway determination; verified parking and fire access; adopted use-specific zoning review; fuel-operator layout and swept paths; environmental review; contractor pricing. The drawings do not establish a permit-ready development or completed feasibility study.

R4.1 | RECORDED PARCEL LINES | 18 OCT 2026

GIS-based baseline; field survey, title, existing interiors and approvals remain outstanding.

NOT FOR CONSTRUCTION, PERMIT, CONVEYANCE OR REPRESENTATION OF APPROVED USES.


SYCAMORE SQUARE

1699-1735 SYCAMORE VIEW ROAD | MEMPHIS, TENNESSEE

PROPOSED BUILDING DIVISION PLAN

R4 | 11,000 SF main rooms aligned to the 1997 column grid; four family suites; twin kitchens; reservable dining

01 FIXED SHELL | REVISED EVENT COMPLEX

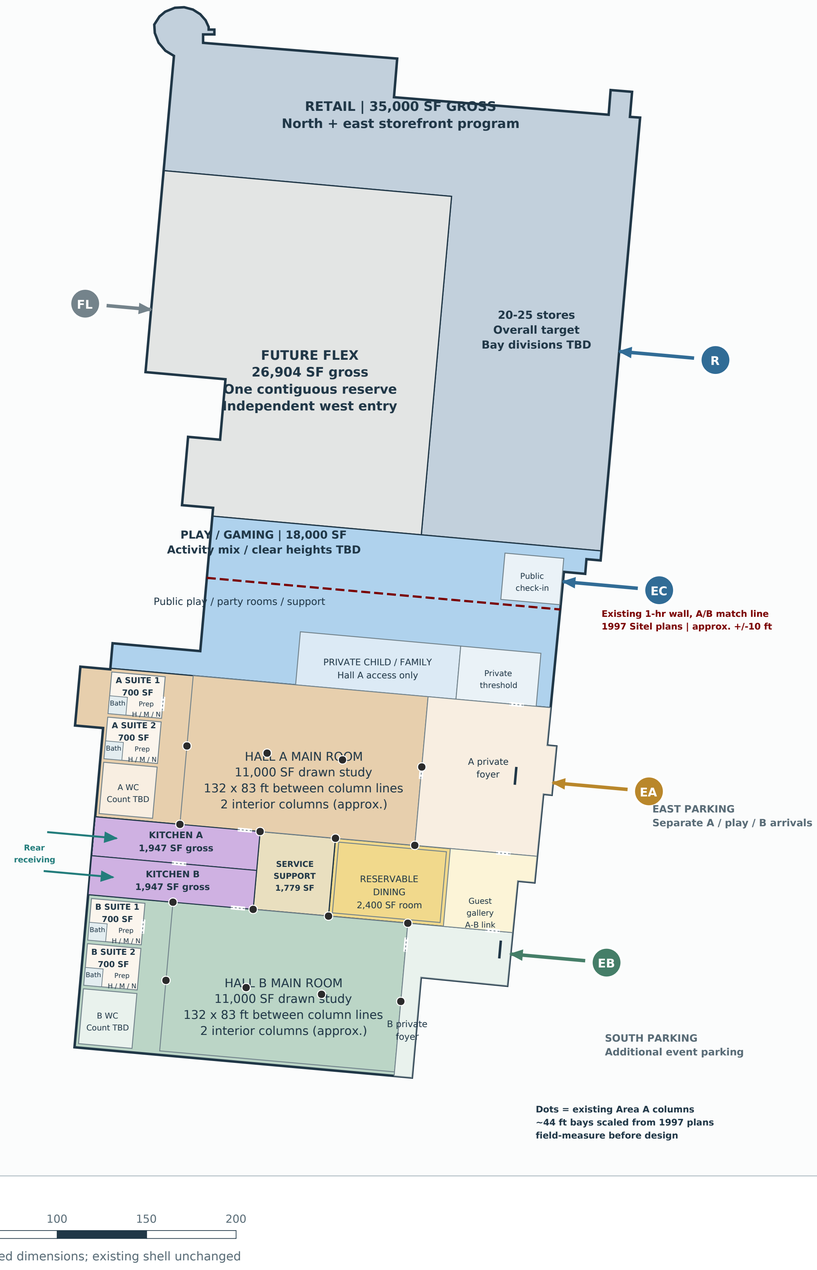

1 in = 40 ft. All room dimensions are proposed assumptions; retained outline is source geometry. Net occupiable area and guest capacity are undetermined. See area ledger.

02 COMPLETE EXISTING-BUILDING FLOOR BUDGET

ID	Use	Drawn footprint SF	Allocated gross SF*
R	Retail storefront program	36,361	35,000
FL	Future flex reserve	27,949	26,904
CH	Indoor play / gaming	18,700	18,000
HA	Hall A suite	21,362	20,563
K	Two linked kitchen suites	4,046	3,895
D	Reservable dining + guest gallery	4,659	4,484
S	Common service / support	1,849	1,779
HB	Hall B suite	17,671	17,009

TOTAL: 127,634 SF allocated against 132,596 SF source footprint. *Gross budgets are proportional to the broker total, not measured net areas. Actual proposed room rectangles are reported separately below. A measured interior survey must reconcile these bases before design proceeds.

03 MAIN ROOMS AND SUPPORT | NO DOUBLE COUNTING

Component	Drawn room SF	Budget treatment / requirement
Hall A main room	11,000	Inside the 20,563 SF Hall A gross budget. 132 x 83 ft between column lines; 2 interior columns (approx.) unless removed by a structural transfer.
Hall B main room	11,000	Inside the 17,009 SF Hall B gross budget. Same 132 ft width on the same column lines; 2 interior columns (approx.)
Family suites	700 each x 4	Included within the respective hall budgets. Each 700 SF block includes a 100 SF full-bath reservation and family preparation area.
Two kitchen suites	1,947 + 1,947 gross	One structural bay deep (~22 ft each), rear receiving each. Narrow for full production: a food-service designer must confirm cook/finish, holding, wash-up and storage fit.
Dining + gallery	4,484 gross	2,400 SF reservable dining room plus a 1,842 SF guest gallery linking the two foyers (coordinated events). Separate from both halls.
Hall remainder	Included	Own guest toilets, foyer, staging / storage, circulation and partitions. Fixture counts and egress capacity remain undetermined.

04 RETAIL, RECREATION AND ARCHITECTURAL HOLDS

35,000 SF retail remains for a target 20-25 units (1,400-1,750 SF gross average). Recreation stays 18,000 SF including the Hall A private child zone; the existing 1-hr A/B wall crosses it and can separate public play from party / private rooms. 1997 plans show existing wet cores and the sprinkler room on the west wall of Area A, which favours keeping kitchens, suites and toilets on that side; confirm by survey. Guest toilet counts (A WC / B WC blocks are a start, not a count) must follow the code fixture calculation; the large A foyer can take more. H / M / N = family hair, makeup and nail prep.

05 WHAT THE 1997 SITEL PLANS ADD (S10)

01 Area A (south part, sheet A2.1) has interior columns on a ~44 x 44 ft grid: 15 column covers are noted. The draft 11,000 SF rooms each enclosed ~4 of them; the R4 rooms span three bays between column lines and enclose 2.

02 A 1-hr rated wall runs along grid 15, the Area A / Area B match line, about 270 ft north of the south wall. It lands inside the 18,000 SF play zone.

03 Area A has wet cores (toilets) and the sprinkler riser room on the west wall; Area B has an existing dock area and stair on the west (rear) side. North of Area B grid 19 (~196 ft) is not covered by the sheets received.

04 The sheets are 1997 tenant drawings, not as-builts. Positions were scaled from dimension strings and registered to the GIS outline (+/-10 ft). Measure columns, clear heights and walls on site before design.

R4.1 | RECORDED PARCEL LINES | 18 OCT 2026

GIS-based baseline; field survey, title, existing interiors and approvals remain outstanding.

NOT FOR CONSTRUCTION, PERMIT, CONVEYANCE OR REPRESENTATION OF APPROVED USES.

A-1

36 x 24 in | Print at 100%


SYCAMORE SQUARE

1699-1735 SYCAMORE VIEW ROAD | MEMPHIS, TENNESSEE

EVENT OPERATIONS AND PRIVACY

R4 | Independent hall entrances, kitchen operations and controlled shared dining

01 GUEST / CHILD / CATERING RELATIONSHIPS

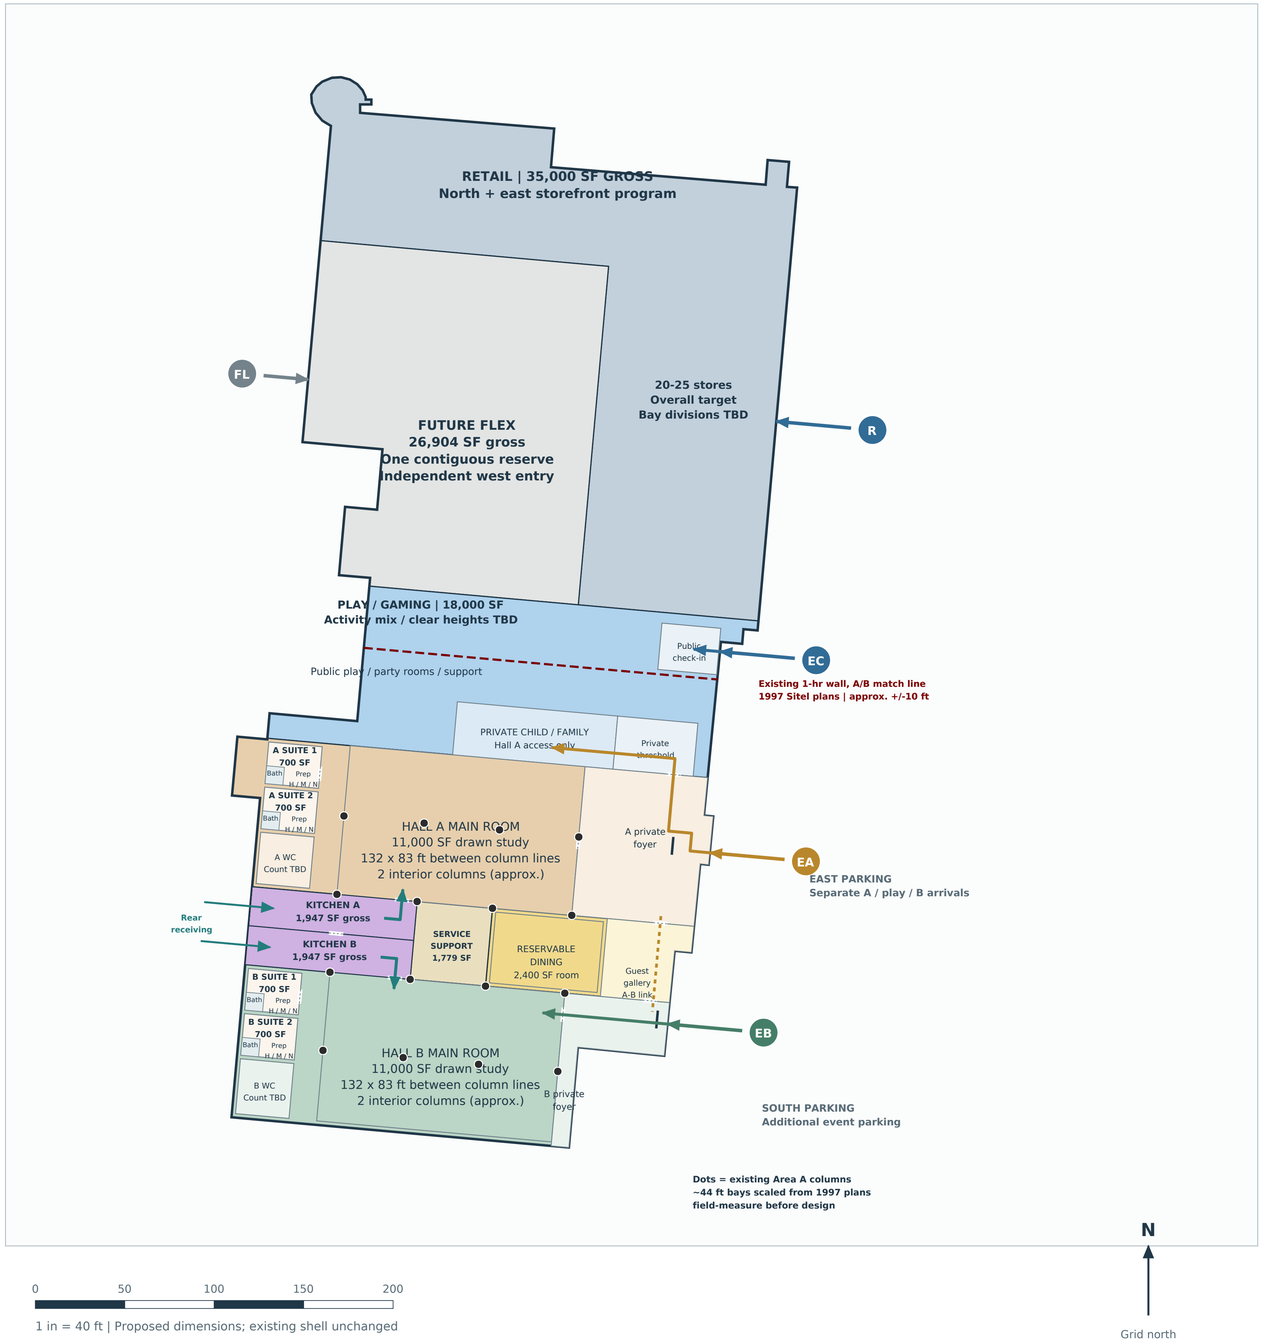

Routes are conceptual reservations, not approved egress or fire-rated door plans. Privacy controls must permit lawful emergency escape. Capacity and licensing remain unresolved.

02 THREE EVENT CONFIGURATIONS

Mode	Guest and family arrangements	Kitchen and dining arrangements
One wedding, both halls	Hall A and Hall B each host part of the guests, each with its own entrance, suites and bathrooms. Hall A has the private access to the child zone.	Both kitchen suites may work under one caterer. Shared dining is assigned exclusively or scheduled with privacy controls; otherwise serve each hall internally.
Two independent events	Separate external arrivals, screened foyers, guest toilets and family suites. Secure guest crossover under an approved egress plan.	Each event uses its own kitchen, dispatch and staff. Shared dining is separately booked by one event or by non-overlapping time slots; the other event dines in its own hall.
One coordinated event	Open the controlled guest link between foyers under one management plan. Maintain both independent entrances and all required exits.	Use kitchens together and dining as a common event room. A linked complex does not create a single unobstructed ballroom.

03 PRIVATE FAMILY AND CHILD ACCESS

01 Hall A guests reach the private child / family zone from their own foyer without entering Hall B, the public play lobby or either kitchen. Hall B has no required internal recreation connection.

02 Private child admissions remain supervised and separate from public check-in at EC. Exclusive use of the full play floor requires an exclusive booking or an approved staffed separation plan.

03 Each family suite includes a full-bath reservation and family preparation space. Provide opaque doors and discreet access; suite assignments and privacy-compatible staff access follow the event plan.

04 Shared dining is an optional amenity, not a required route into either hall. During exclusive use, secure the other guest entrance without obstructing emergency egress. Scheduled use includes clearing, cleaning and privacy transition time.

04 TWO KITCHENS THAT CAN OPERATE TOGETHER

Kitchen A serves Hall A directly; Kitchen B serves Hall B directly. Each requires its own adequate cook / finish, holding, wash-up and storage provision. The center connection may be controlled for independent events or opened for one caterer. Service to dining enters from the central support side, apart from its guest link. A partition alone does not establish independent kitchen operations; the food-service designer must verify equipment, ventilation, grease, drainage, staffing and sanitation.

- Hall A guests / private child access
- Hall B independent guest entry
- Independent A/B catering dispatch
- Public recreation entry
- Controlled shared-dining guest link

R4.1 | RECORDED PARCEL LINES | 18 OCT 2026

GIS-based baseline; field survey, title, existing interiors and approvals remain outstanding.

NOT FOR CONSTRUCTION, PERMIT, CONVEYANCE OR REPRESENTATION OF APPROVED USES.


SYCAMORE SQUARE

1699-1735 SYCAMORE VIEW ROAD | MEMPHIS, TENNESSEE

PARKING AND VEHICLE CIRCULATION

R4 | Separate arrivals; frontage fuel access; larger main rooms require renewed demand testing

01 EXISTING PAVING / PROPOSED ROUTE INTENT

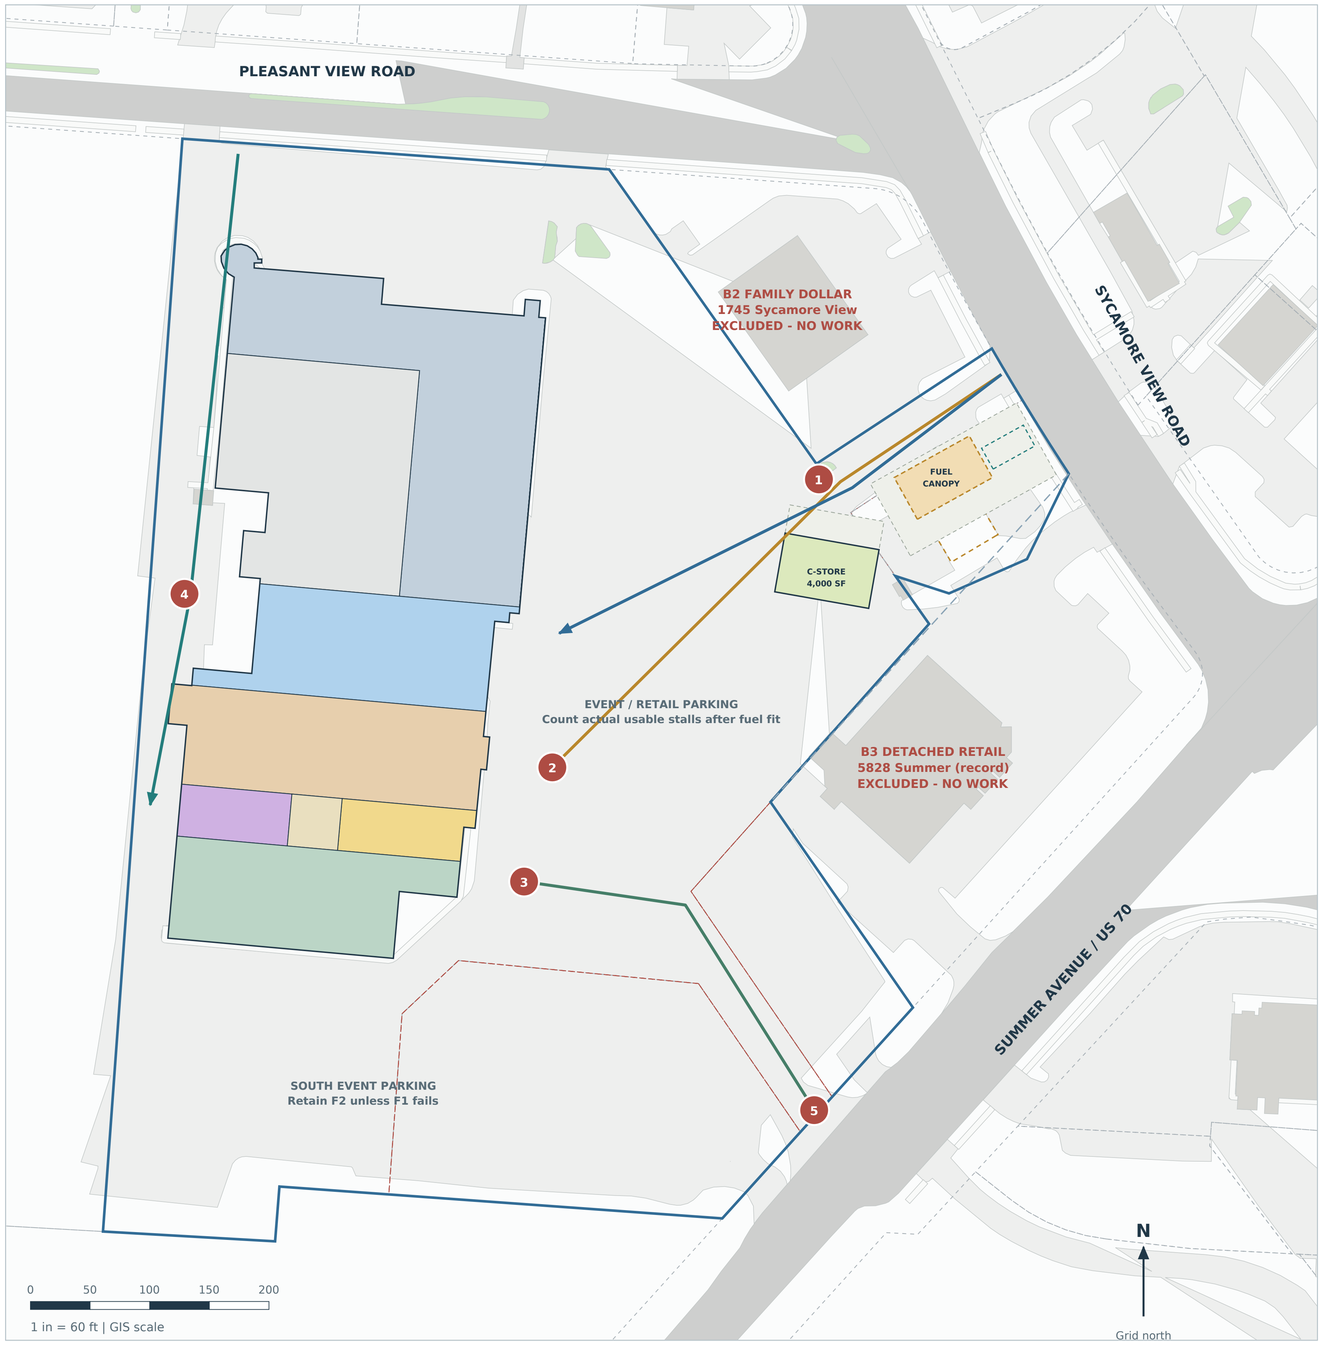

Existing curb / parking geometry remains source-derived. Route arrows are planning intent, not measured lanes or swept paths. All demand inputs are explicit assumptions.

02 PARKING DEMAND | ILLUSTRATIVE ATTENDANCE TESTS

Assume 2.5 event guests per arriving vehicle. The table tests attendance; it does not establish hall capacity or legal parking ratios. Children accompanying wedding guests are already in event vehicles. Staff, vendors, public play and retail are additional.

Attendance scenario	Event cars	Staff / vendors	Retail + public play	Total cars
400 wedding guests total	160	40	110 + 30	340
400 per hall / 800 total	320	60	160 + 50	590
500 per hall / 1,000 total	400	75	175 + 75	725
600 per hall / 1,200 total	480	90	175 + 100	845

Usable supply is UNDETERMINED. Broker 909, prior-study 769 and after-pad 533 counts are unverified and not interchangeable. Fuel customer spaces / queueing and tanker movements are additional and must be designed locally at F1. Shared-dining occupants are event guests, not extra capacity unless operated as a separate simultaneous use.

03 NUMBERED CIRCULATION CONFLICTS

01 D3 / F1: retain the main connection through the frontage. The C-4 test reserves a 30 ft conceptual route through the existing ~50 ft GIS throat. Neither dimension proves legal access or fire clearance.

02 Hall A: screened east arrival and protected walk to its foyer. Keep public recreation queues at EC separate. Verify accessible stalls, slopes and curb transitions.

03 Hall B: its own east entry at the southern building step, supported by east and south parking. Neither event enters through the other. Drop-off and queuing geometry remain undetermined.

04 Rear service: independent receiving into both kitchen suites. Preserve loading and waste access; verify truck maneuvering and avoid guest circulation.

05 Summer access: verify easements, turning permissions and road-agency jurisdiction before modifications. No new curb cut is assumed for the fuel option.

04 PARKING CONSEQUENCE OF THE FUEL OPTION

C-4 consumes part of the frontage / adjacent subject parking for a new store and fuel operations. A verified stall count, accessible parking plan, fire route and fuel-truck swept-path test must quantify the loss. Do not assume a freestanding store preserves all existing stalls or that a tanker can circulate simply because the rectangles fit. Event operating limits must follow the final parking and life-safety analysis.

R4.1 | RECORDED PARCEL LINES | 18 OCT 2026

GIS-based baseline; field survey, title, existing interiors and approvals remain outstanding.

NOT FOR CONSTRUCTION, PERMIT, CONVEYANCE OR REPRESENTATION OF APPROVED USES.


SYCAMORE SQUARE

1699-1735 SYCAMORE VIEW ROAD | MEMPHIS, TENNESSEE

FRONTAGE FUEL AND CONVENIENCE-STORE TEST

R4 | Canopy fronts the existing throat drive; store beside it | Containment test, NOT an approved station

01 PREFERRED FRONTAGE F1 | SCALE 1 IN = 30 FT

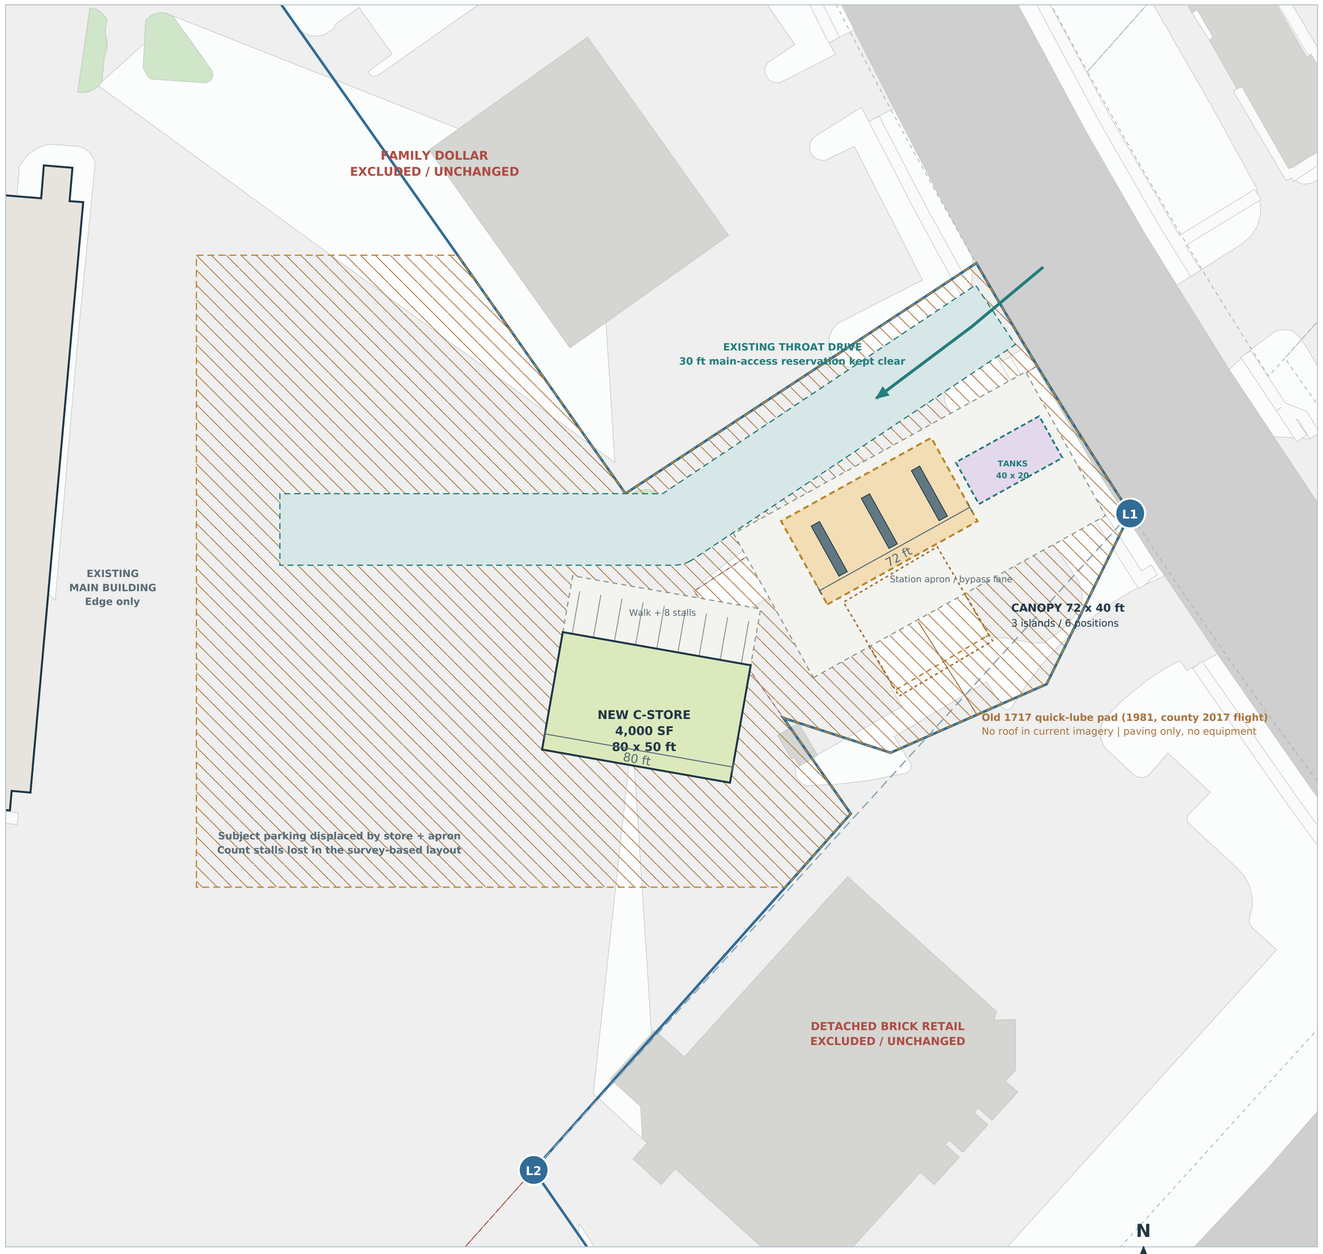

No existing building, parcel vertex or road has been relocated. Blue boundary = recorded parcel lines (tax records), not a survey; dashed L1-L2 = broker line, not used. Module fit is necessary but insufficient for feasibility.

02 WHAT CHANGED FROM THE DRAFT, AND WHY

01 The draft placed the 80 x 50 ft store across the assumed 30 ft main-access route. A position search over the acquisition land showed why: south of the throat the frontage is only about a third of an acre with under 100 ft of road edge, so store + canopy + aisles as ONE block only fit 200-240 ft back from Sycamore View.

02 Splitting the program resolves it. The canopy (6 positions) and tank reservation sit on the frontage, 91 ft from the road edge, and take access straight off the existing throat drive. The 4,000 SF store sits beside it on adjoining planning land, 41 ft from the canopy, facing the same drive.

03 All three modules stay inside the recorded parcel lines, clear of the 30 ft access reservation, the Family Dollar and 5828 records, and 40 ft from the main building (checked in code). Family Dollar and the brick building are untouched.

04 The old 1717 structure is a 1981 quick-lube in county planimetrics (2017 flight). Current imagery shows no roof. Canopy, tanks and store avoid its footprint; only ~1,011 SF of station paving crosses it. A Phase I ESA must check for former oil tanks before any work here.


03 F1 VERSUS F2 | SAME MODULE SIZES

Test	F1 frontage (preferred)	F2 5800 Summer (fallback)
Fit	Canopy + tanks on frontage; store separate, beside it	Store + canopy + aisles fit as one integrated block
Road	Sycamore View, 30,226 AADT (study figure); under 100 ft own frontage south of throat	Summer Ave / US 70, 21,290 AADT (study figure); ~240 ft along both pads
Access	Existing throat drive, shared with venue arrivals	Existing Summer drive kept clear; pad uses it
Costs	Event / retail parking behind Family Dollar; old quick-lube pad	Pad / south event parking; flood layer edge to west
Open	Queues at the throat during events; tanker path	Losing the best pad for other income

04 STILL NOT ESTABLISHED

Parcel-specific zoning for fuel sales, setbacks and canopy rules; fire review; tank size and anchorage; dispenser queues and stacking at the shared throat during events; tanker swept path and stopping position; utilities, grades and drainage; title to the frontage; Phase I ESA. Store area +4,000 SF is new construction outside the 127,634 SF building; the 2,880 SF canopy is covered site area, not floor area. Obtain an operator concept before spending on design.

05 F2 FALLBACK FIT | 5800 SUMMER | 1 IN = 60 FT

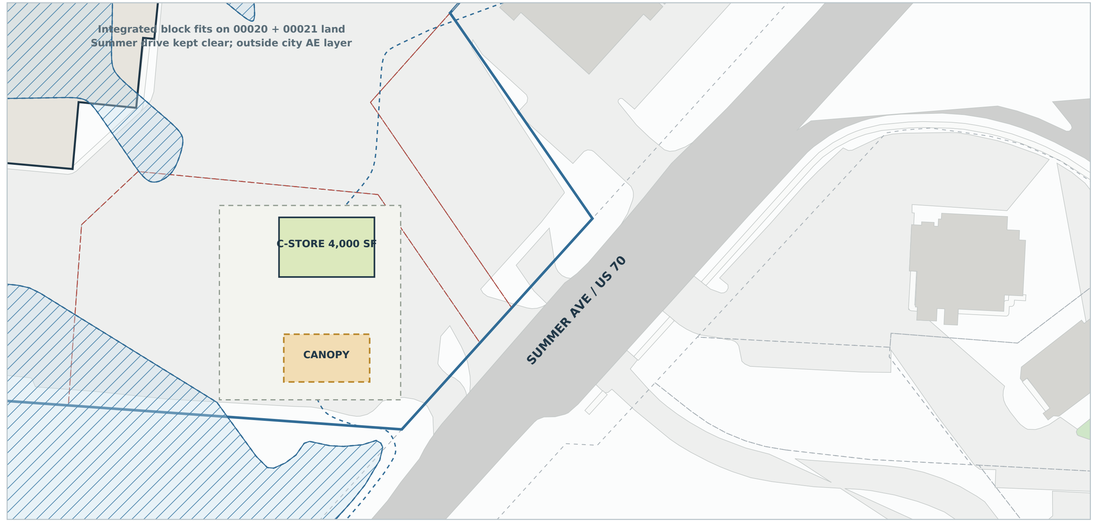

R4.1 | RECORDED PARCEL LINES | 18 OCT 2026

GIS-based baseline; field survey, title, existing interiors and approvals remain outstanding.

NOT FOR CONSTRUCTION, PERMIT, CONVEYANCE OR REPRESENTATION OF APPROVED USES.


SYCAMORE SQUARE

1699-1735 SYCAMORE VIEW ROAD | MEMPHIS, TENNESSEE

PRELIMINARY ARCHITECTURAL IMPROVEMENTS


Entrance interventions within the existing shell | No invented existing elevations

01 INTERVENTION LOCATIONS

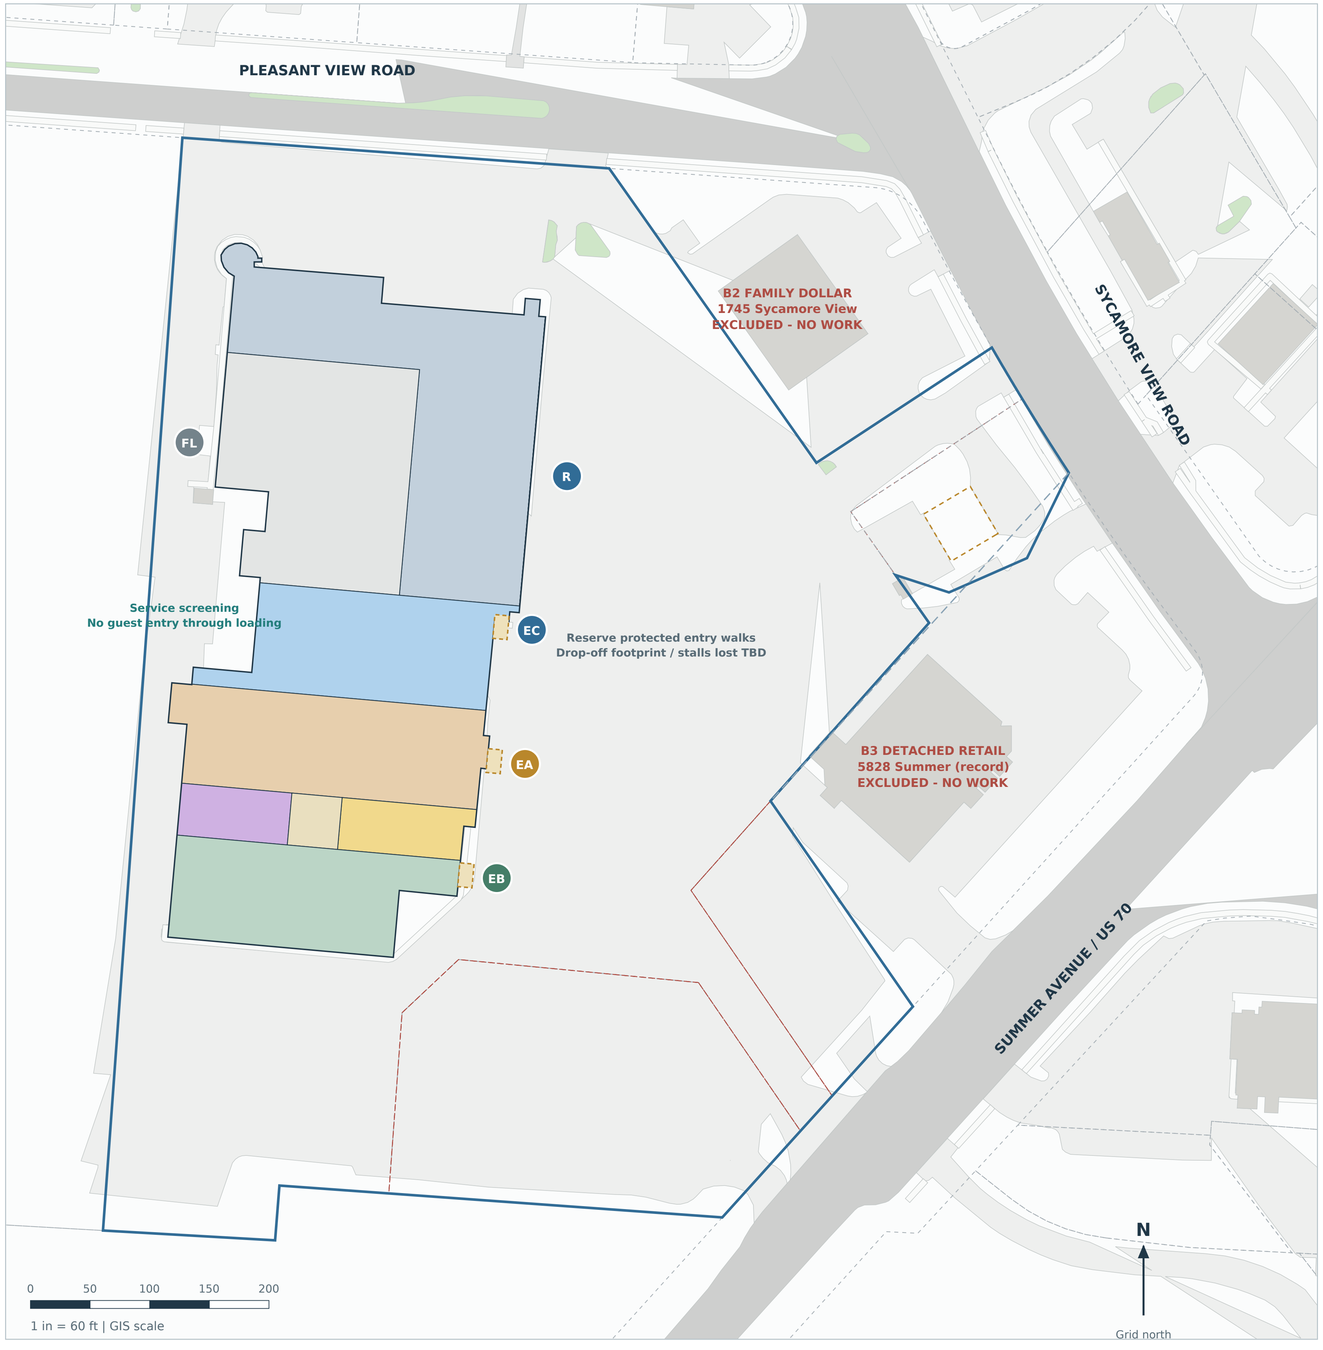

Plan scale 1 in = 60 ft. Entry diagram NTS. Existing shell and adjacent structures remain fixed. Architectural modules and finish strategy are preliminary design assumptions P1.

02 SCREENED ENTRY PRINCIPLE | DIAGRAM / NOT TO SCALE

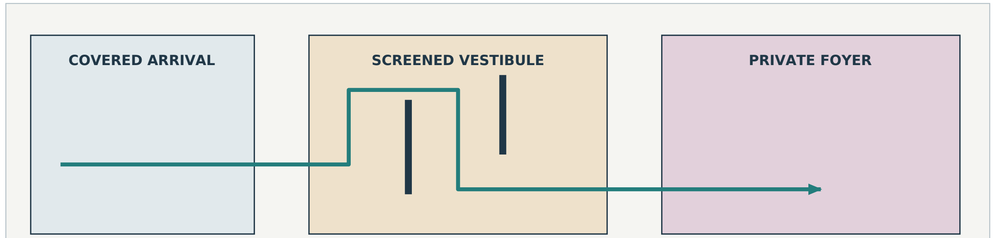

Offset doors and opaque returns interrupt outside-to-hall sightlines.

01 EA / EB: matching premium entrance identities with separate signs, weather protection, warm lighting and discreet event check-in. Hall A carries the private child connection.

02 Entry screens must preserve required clear widths, accessible maneuvering, glazing safety and free egress. Canopy modules shown on plan are 20 x 12 ft study reservations, not measured or approved additions.

03 EC: distinct public identity, visible staffed reception and family-friendly glazing. Avoid direct views into the wedding childcare rooms.

04 Retail: consistent individual storefronts along the north / east band. Flex: separate west-side identity. Preserve retail customer access while wedding arrivals are underway.

03 ECONOMIC REUSE AND SITE EXPERIENCE

01 Inspect existing canopies, facade panels and entry features for reuse. Coordinate any new anchors with the structural engineer; roof framing and footing capacity are unknown.

02 Use consistent signage, pavement wayfinding, pedestrian lighting and a limited planting palette. Keep planting and screens out of sight triangles, fire routes and drainage paths.

03 Study a screened photography court only after parking and flood approvals. It is not credited as usable event space or drawn over any neighboring property.

04 Select flood-compatible lower finishes and elevated vulnerable services only as part of the accepted flood strategy. Decorative work cannot substitute for compliance.

04 INTERIOR DESIGN / MEASURED INFORMATION REQUIRED

Family suites: private full baths, well-lit seated makeup / hair stations, nail-preparation surfaces, garment storage and opaque doors. Separate hall palettes may share a coordinated entrance identity. Dining receives its own bookable identity. Detailed finishes, furniture, lighting, salon plumbing and kitchen equipment await measured interiors, columns, heights, fire ratings, grades and utility surveys. This is concept direction, not a full interior-design package.

R4.1 | RECORDED PARCEL LINES | 18 OCT 2026

GIS-based baseline; field survey, title, existing interiors and approvals remain outstanding.

NOT FOR CONSTRUCTION, PERMIT, CONVEYANCE OR REPRESENTATION OF APPROVED USES.

36 x 24 in | Print at 100%

SYCAMORE SQUARE

1699-1735 SYCAMORE VIEW ROAD | MEMPHIS, TENNESSEE

SPACE ALLOCATION, BUDGET RANGES AND PHASING

Budget ranges from the feasibility study | Phase decisions depend on verified site capacity and operator demand

01 BUILDING AREA LEDGER

Use	Allocated floor SF*	Business role	Basis
Retail storefront program	35,000	Independent lease	P1 area allocation
Future flex reserve	26,904	Future project reserve	P1 area allocation
Indoor play / gaming	18,000	Public play + wedding support	P1 area allocation
Hall A suite	20,563	Event operation	P1 area allocation
Two linked kitchen suites	3,895	Event operation	P1 area allocation
Reservable dining + guest gallery	4,484	Event operation	P1 area allocation
Common service / support	1,779	Common support	P1 area allocation
Hall B suite	17,009	Event operation	P1 area allocation
TOTAL ALLOCATED FLOOR AREA	**127,634 SF**		

*Every existing-building square foot is allocated, including gross internal support and circulation. Event complex: 47,730 SF gross (A 20,563 + B 17,009 + kitchens 3,895 + dining / gallery 4,484 + service 1,779). Zones follow the 1997 column grid, so they are no longer round numbers; flex absorbs the balance. Separate new C-store: +4,000 SF conditional; combined floor budget 131,634 SF. Canopy 2,880 SF is covered site area, not floor area.

02 CAPITAL BUDGET RANGES | EXCLUDING ACQUISITION AND FINANCING

Budget line	Worst	Realistic	Best
Base-building hard cost	$15.52M	$9.45M	$4.83M
Design, permits, legal	$1.86M	$0.94M	$0.39M
Contingency	$2.33M	$1.13M	$0.48M
Tenant allowances + leasing commissions	$2.33M	$2.09M	$1.72M
Flood mitigation (inside hard cost)	$3.00M	$1.50M	$0.00M

From the companion Feasibility Study: Landlord View (18 Oct 2026). Ranges use researched 2026 Memphis-adjusted unit costs, not bids. Flood mitigation is $0 only if an elevation certificate / LOMA or the substantial-improvement method removes it. Replace with quantity-based contractor budgets after survey and condition assessments.

03 SEPARATE LANDLORD AND OPERATING FEASIBILITY STUDIES

LANDLORD STUDY: model actual rentable areas, achieved rents, lease-up, vacancy, incentives, landlord works, recoveries, insurance, tax, maintenance, reserves and financing. Flex is future capacity, not day-one income.

OPERATOR STUDIES: separate profit-and-loss and cash-flow models for banquet / catering, recreation, retail / C-store and fuel. Include market demand, utilization, staffing, fit-out, equipment, working capital, insurance, operating costs and break-even. Each operating business pays the assumed landlord rent in its own model.

CONSOLIDATION: Do not add tenant sales to landlord rent or treat gross event receipts as property NOI. No market rents, bookings, ticket prices or profit forecast are established by this drawing.

Budget ranges are planning estimates. No valuation, cost quote, market rent or approved capacity is represented.

04 PHASING AND GO / NO-GO CONDITIONS

Phase	Work / purpose	Release condition
0	ALTA / boundary + topo; title; elevation certificate; effective FEMA / floodway review; structural / MEP survey; Phase I ESA; planning conference.	Legal land and access reconcile. Flood compliance strategy and assembly conversion costs are financeable.
1	Retail and utility planning; first hall with its kitchen only if final twin-kitchen, shared-dining, privacy and construction-separation arrangements remain viable. Preserve flex.	Tenant or operator commitments, parking count, approved occupancy / egress and independent construction access.
2	Second hall and kitchen, reservable dining, 18,000 SF recreation and the private Hall A child connection. Full interiors follow measured rooms, equipment and code / MEP coordination.	Two simultaneous events work in the verified peak parking and service model; staffing and licensing settled.
3	Fuel only if an operator proves a lawful fit. Compare ground lease with landlord-built and owner-operated structures.	Title / access, swept paths, environmental, fire / UST, drainage, zoning, funding and parking-loss case pass.

05 MAJOR FEASIBILITY RISKS AND CORRECTIONS

01 Flood: ~74% building overlap is corroborated by the city layer, not an effective FEMA determination. A substantial-improvement analysis uses the structure's market value, excluding land. The purchase price is not automatically the denominator. [S5,S8]

02 The prior claim that simple divisions stay below the flood threshold is unsupported without a scope / cost and valuation review. Phasing must not be used to evade cumulative rules. Nonresidential elevation / dry-floodproofing options need professional and local approval.

03 Tax parcel separation does not establish development entitlement, independent access or permission to sell without further approvals. Obtain title, recorded plats and the parking / cross-access REA.

04 Premium assembly conversion can be dominated by roof / structure, fire and egress, HVAC fresh air, restrooms, kitchen exhaust / grease / drainage, electrical service, acoustics and flood mitigation. Removing the 2 interior columns per hall needs a structural transfer design and price.

05 A ground lease can shift fuel capital and operation to an experienced operator, but environmental exposure, indemnities, insurance, monitoring and end-of-term tank removal still need allocation. Compare actual term sheets; do not assume fuel is the best use.

06 PROFESSIONAL REVIEW PACKAGE TO REQUEST

Survey and signed purchase exhibit; current deeds and easements; original 1997 plans and later permits; roof / column / MEP surveys; effective FIRM + LOMRs + elevations; verified parking inventory; code / zoning matrix by use; fuel operator swept paths and term sheet; quantity-based contractor budget. Further revisions replace assumptions when supporting evidence is supplied. R4 adopts 11,000 SF main rooms on the 1997 column grid, four family suites, twin kitchens and bookable dining. The event complex exceeds the earlier 23,000-30,000 SF hall-only goal to meet the clarified room program. Full interiors and financial studies remain subsequent work. Title, field dimensions and the fuel operator case are unresolved.