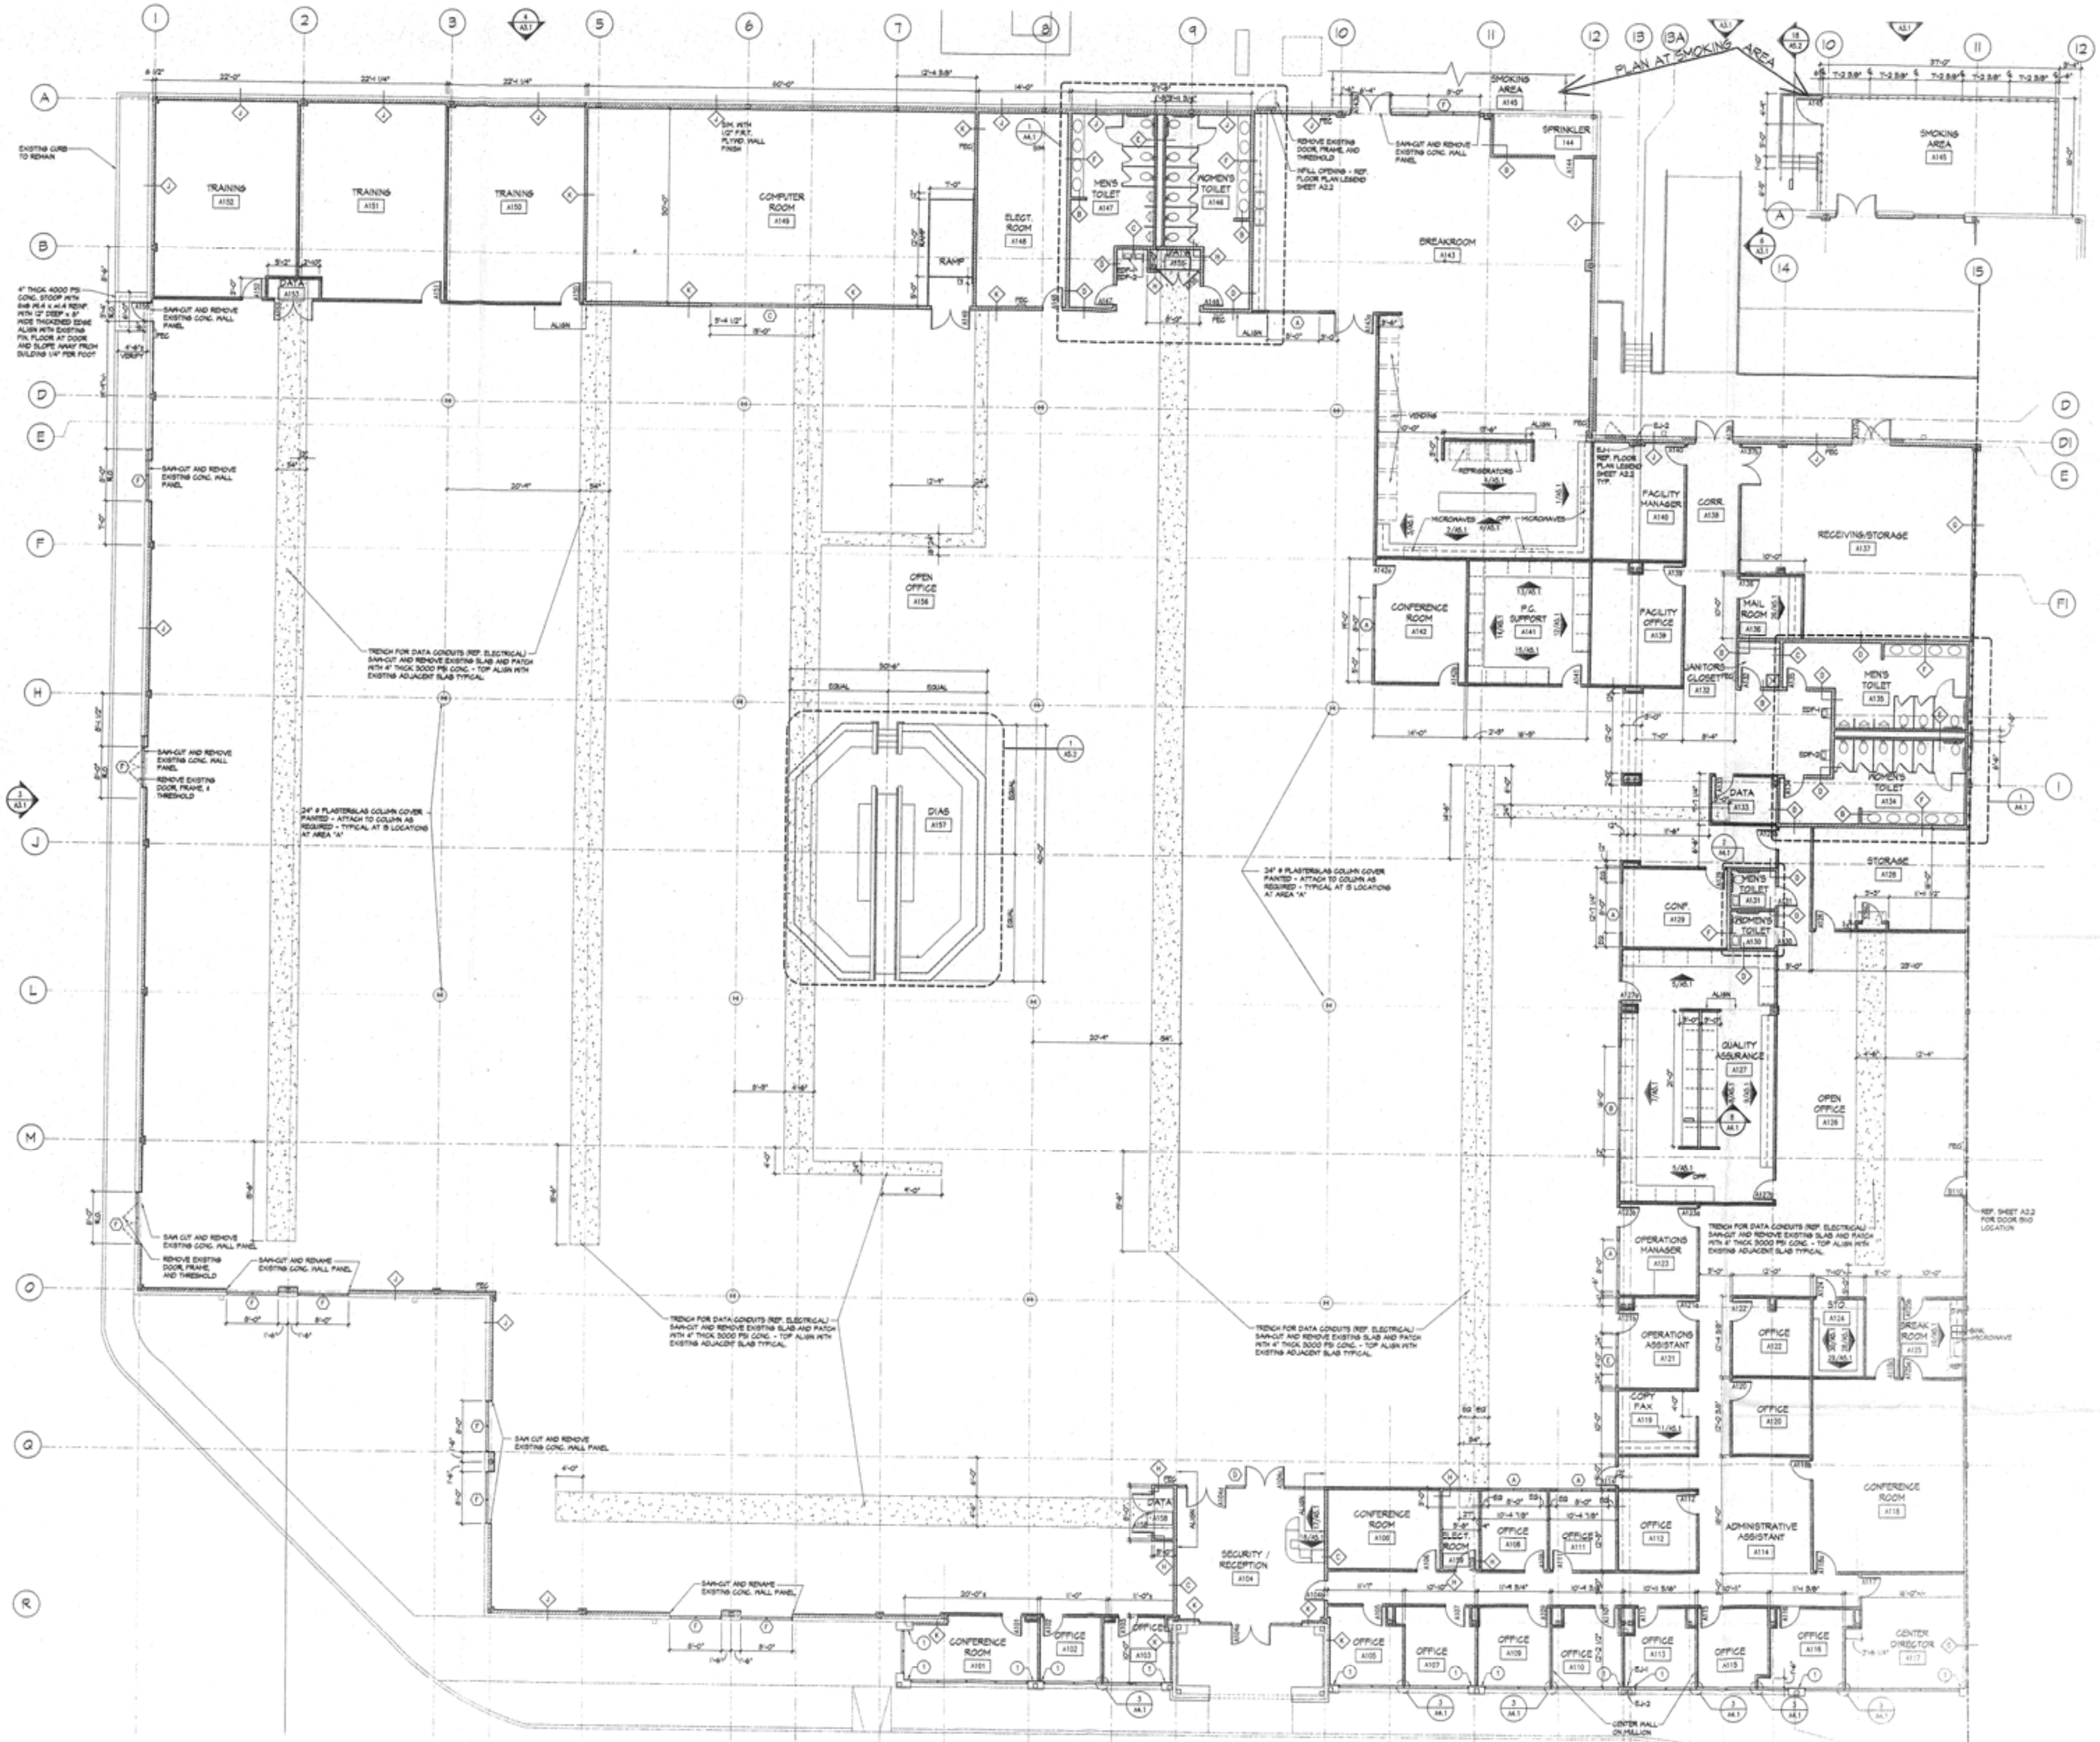
PLAN AT SMOKING AREA
SMOKING AREA A145
SPRINKLER 144
TRAINING A152
TRAINING A151
TRAINING A150
DATA A153
COMPUTER ROOM A149
SIM. WITH 1/2" F.R.T. PLYWD. WALL FINISH
RAMP
ELECT. ROOM A148
MEN'S TOILET A147
WOMEN'S TOILET A146
DATA A155
BREAKROOM A143
REMOVE EXISTING DOOR, FRAME, AND THRESHOLD
INFILL OPENING - REF. FLOOR PLAN LEGEND SHEET A2.2
SAW-CUT AND REMOVE EXISTING CONC. WALL PANEL
EXISTING CURB TO REMAIN
4" THICK 4000 PSI CONC. STOOP WITH 6x6 W1.4 x W1.4 REINF. WITH 12" DEEP x 8" WIDE THICKENED EDGE ALIGN WITH EXISTING FIN. FLOOR AT DOOR AND SLOPE AWAY FROM BUILDING 1/4" PER FOOT
VENDING
REFRIGERATORS
MICROWAVES
EJ-1 REF. FLOOR PLAN LEGEND SHEET A2.2 TYP.
FACILITY MANAGER A140
CORR. A138
RECEIVING/STORAGE A137
CONFERENCE ROOM A142
P.C. SUPPORT A141
FACILITY OFFICE A139
MAIL ROOM A136
JANITORS CLOSET A132
MEN'S TOILET A135
WOMEN'S TOILET A134
DATA A133
STORAGE A128
CONF. A129
MEN'S TOILET A131
WOMEN'S TOILET A130
OPEN OFFICE A156
DIAS A157
TRENCH FOR DATA CONDUITS (REF. ELECTRICAL) SAW-CUT AND REMOVE EXISTING SLAB AND PATCH WITH 4" THICK 3000 PSI CONC. - TOP ALIGN WITH EXISTING ADJACENT SLAB TYPICAL
24" Ø PLASTERGLAS COLUMN COVER PAINTED - ATTACH TO COLUMN AS REQUIRED - TYPICAL AT 15 LOCATIONS AT AREA "A"
SAW-CUT AND REMOVE EXISTING CONC. WALL PANEL
REMOVE EXISTING DOOR, FRAME, & THRESHOLD
QUALITY ASSURANCE A127
OPEN OFFICE A126
REF. SHEET A2.2 FOR DOOR B110 LOCATION
OPERATIONS MANAGER A123
OPERATIONS ASSISTANT A121
OFFICE A122
STO. A124
BREAK ROOM A125
SINK
MICROWAVE
COPY FAX A119
OFFICE A120
CONFERENCE ROOM A118
ADMINISTRATIVE ASSISTANT A114
OFFICE A112
OFFICE A111
OFFICE A108
ELECT. ROOM A109
CONFERENCE ROOM A106
SECURITY / RECEPTION A104
DATA A158
CONFERENCE ROOM A101
OFFICE A102
OFFICE A103
OFFICE A105
OFFICE A107
OFFICE A109
OFFICE A110
OFFICE A113
OFFICE A115
OFFICE A116
CENTER DIRECTOR A117
CENTER MULL ON MULLION
SAW CUT AND REMOVE EXISTING CONC. WALL PANEL
REMOVE EXISTING DOOR, FRAME, AND THRESHOLD
SAW-CUT AND RENAME EXISTING CONC. WALL PANEL
NORTH

1 FLOOR PLAN - AREA "A"

1/8" = 1'-0"

JACKSON
BRONSON
& FERACI
ARCHITECTS
& PLANNERS
1764 Paragon Drive - Suite 12
Memphis, Tennessee 38132
Voice(901)332-5535 Fax(901)332-5534

Revision

SITEL CORPORATION
SYCAMORE SQUARE
1699 SYCAMORE VIEW ROAD
MEMPHIS, TN. 38134

Sheet Title	FLOOR PLAN - AREA "A"
Project No.	4134
Drawing File No.	4134A21
Drawn by	JDF
Date	7/14/97

Sheet No. A2.1

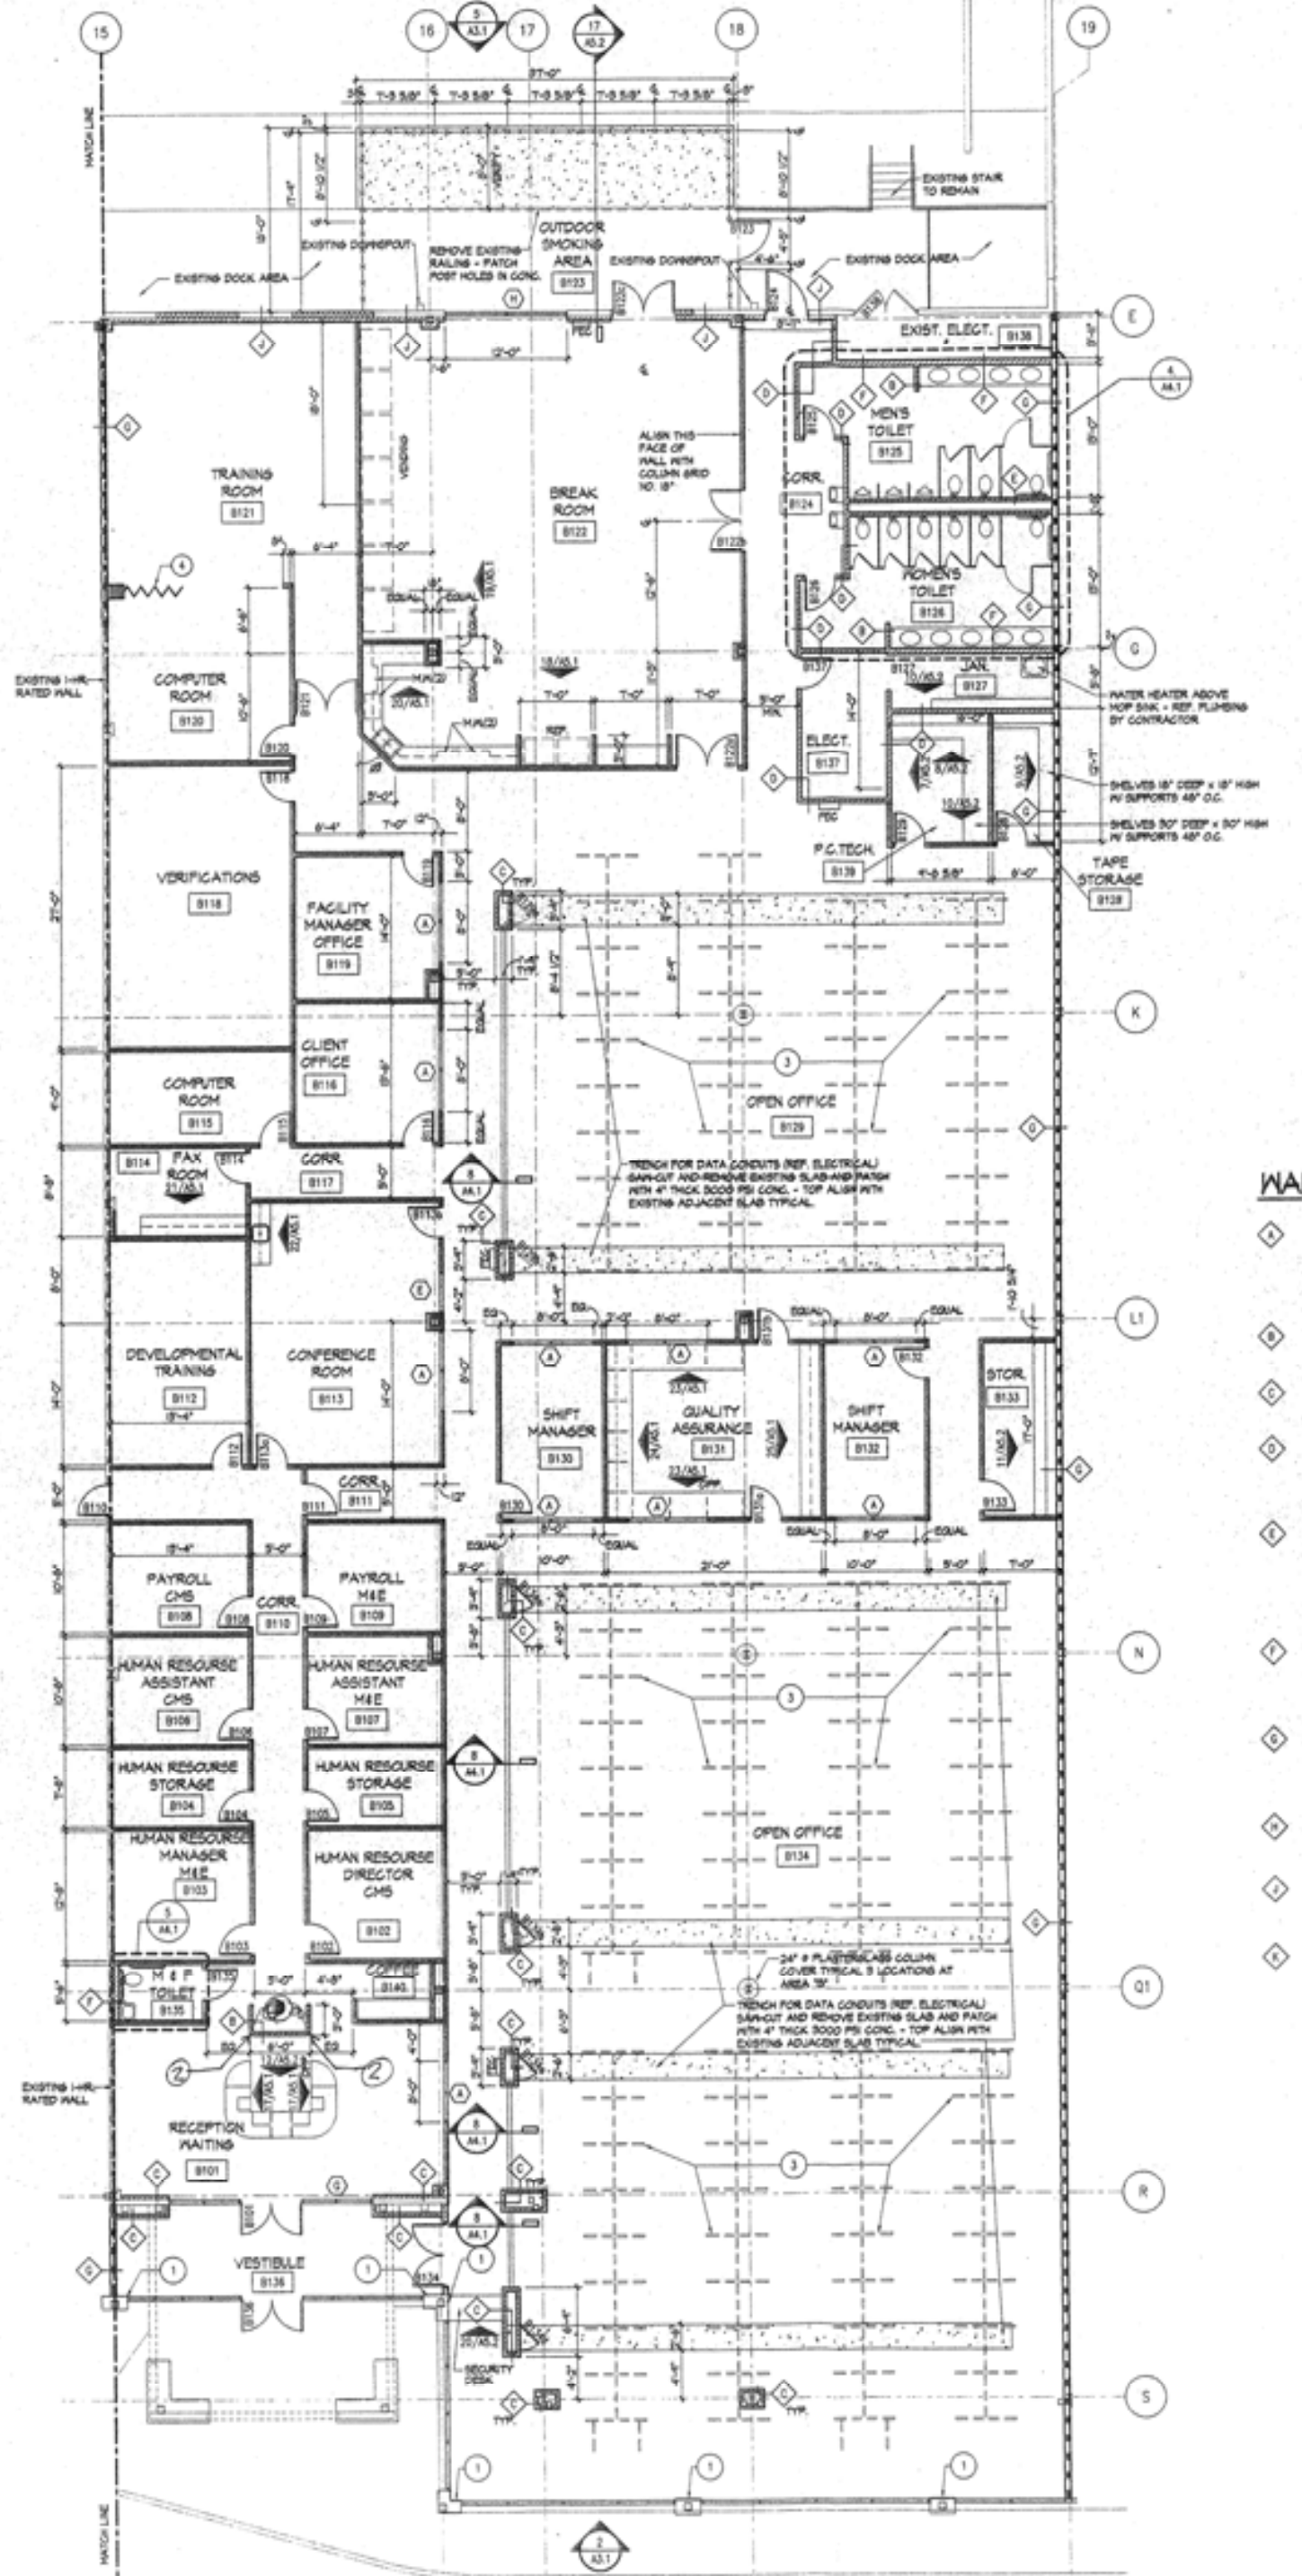
TRAINING ROOM B121
BREAK ROOM B122
OUTDOOR SMOKING AREA B133
MEN'S TOILET B125
WOMEN'S TOILET B126
EXIST. ELECT. B138
COMPUTER ROOM B120
VERIFICATIONS B118
FACILITY MANAGER OFFICE B119
CLIENT OFFICE B116
COMPUTER ROOM B115
FAX ROOM B114
CORR B117
DEVELOPMENTAL TRAINING B112
CONFERENCE ROOM B113
SHIFT MANAGER B130
QUALITY ASSURANCE B131
SHIFT MANAGER B132
STOR. B133
OPEN OFFICE B129
OPEN OFFICE B134
PAYROLL CMS B108
PAYROLL M&E B109
HUMAN RESOURSE ASSISTANT CMS B106
HUMAN RESOURSE ASSISTANT M&E B107
HUMAN RESOURSE STORAGE B104
HUMAN RESOURSE STORAGE B105
HUMAN RESOURSE MANAGER M&E B103
HUMAN RESOURSE DIRECTOR CMS B102
M & F TOILET B135
RECEPTION WAITING B101
VESTIBULE B136
ELECT. B137
JAN. B127
F.C.TECH. B139
TAPE STORAGE B128
EXISTING STAIR TO REMAIN
EXISTING DOCK AREA
EXISTING 1-HR. RATED WALL
WATER HEATER ABOVE MOP SINK - REF. PLUMBING BY CONTRACTOR
SHELVES 18" DEEP x 18" HIGH W/ SUPPORTS 48" O.C.
SHELVES 30" DEEP x 30" HIGH W/ SUPPORTS 48" O.C.
TRENCH FOR DATA CONDUITS (REF. ELECTRICAL) SAW-CUT AND REMOVE EXISTING SLAB AND PATCH WITH 4" THICK 3000 PSI CONC. - TOP ALIGN WITH EXISTING ADJACENT SLAB TYPICAL
24" ⌀ PLASTER/GLASS COLUMN COVER TYPICAL 3 LOCATIONS AT AREA "B"
SECURITY DESK
MATCH LINE

1 FLOOR PLAN - AREA "B"

1/8" = 1'-0"

FLOOR PLAN LEGEND

	EXISTING WALLS TO REMAIN UNLESS NOTED OTHERWISE
	ULTRAWALL PARTITION SYSTEM - REFER TO WALL TYPE "A", SHEET A2.2.
	METAL STUD AND GYPSUM BOARD PARTITION REFER TO WALL TYPES SHEET A2.2.
	EXISTING 1 HOUR RATED WALL TO REMAIN
	3 5/8" x 20 GA. METAL STUDS AT 16" O.C. - MAX WITH 1/2" MOISTURE RESISTENT GYPSUM BOARD, 1" E.I.F.S., AND R-11 BATT INSULATION - ALIGN FACE OF E.I.F.S. WITH FACE OF EXISTING ADJACENT CONC. PANEL AND CAULK FULL PERIMETER OF E.I.F.S. - COLOR OF E.I.F.S. BY ARCHITECT.
	1-HOUR RATED WALL - REFER TO WALL TYPE "G" SHEET A2.2
A113	DOOR WITH DOOR NUMBER
A113	ROOM NUMBER
EDF-1	ELECTRIC DRINKING FOUNTAIN - REFER TO PLUMBING DRAWINGS SUPPLIED BY CONTRACTOR.
EDF-2	HANDICAP ACCESSIBLE ELECTRIC DRINKING FOUNTAIN- SPOUT HEIGHT NO HIGHER THAN 36" A.F.F. WITH CLEAR KNEE SPACE OF 27" A.F.F. WITH FRONT OR SIDE MOUNTED CONTROL, UNIT SHALL COMPLY WITH ADA AND LOCAL HANDICAPP ACCESSIBILITY REQUIREMENTS - REFER TO PLUMBING DRAWINGS SUPPLIED BY CONTRACTOR
FEC	FIRE EXTINGUISHER & CABINET, VISTA SERIES SEMI RECESSED CABINET MODEL NO. FS-V-2709 WITH MP10 EXTINGUISHER WITH UL RATING 2A-10B:C BY LARSEN MANUF. COMPANY.
EJ-1	EXPANSION JOINT COVER - SERIES VSM-200 BY MM SYSTEMS CORPORATION, COLOR AS SELECTED BY OWNER.
EJ-2	EXPANSION JOINT COVER - BACKER ROD AND SEALANT CONTINUOUS, COLOR AS SELECTED BY ARCHITECT
◇B	WALL TYPES - REF. SHEET A2.2
ⓐ	WINDOW TYPES - REF. SHEET A-4
①	KEY NOTES - REF. SHEET A2.2

WALL TYPES:

- ◇A ULTRAWALL PARTITION SYSTEM BY USG CORPORATION WIDTH OF 3 5/8" WITH 3/4" VINYL FACED GYP. BD. PANELS EACH SIDE WITH PAINTED TRIM - EXTEND TO BOTTOM OF CEILING GRID.

ALL WALLS ARE TYPE "A" UNLESS NOTED OTHERWISE

- ◇B 3 5/8" X 25 GA. METAL STUDS AT 24" O.C. MAX. WITH 1/2" GYPSUM BOARD EACH SIDE - EXTEND TO BOTTOM OF CEILING GRID - REF. DETAIL 1/A4)
- ◇C 3 5/8" x 25 GA. MTL. STUDS AT 24" O.C. MAX WITH 1/2" GYP. BD. 1 SIDE - EXTEND ENTIRE WALL TO 6" ABOVE CEILING.
- ◇D 3 5/8" X 25 GA. METAL STUDS AT 24" O.C. MAX. WITH 1/2" GYPSUM BOARD EACH SIDE WITH R-11 BATT INSULATION EXTEND METAL STUDS AND 1 SIDE OF GYP. BOARD TO DECK, EXTEND BATT INSULATION AND OTHER SIDE OF GYPSUM BOARD 6" ABOVE CEILING.
- ◇E PLUMBING WALL, 2 - 3 5/8" X 25 GA. METAL STUDS AT 24" O.C. MAX WITH 1/2" GYPSUM BOARD 1 SIDE AT EACH STUD WALL WITH R-11 BATT INSULATION AT 1 STUD WALL - EXTEND 1 STUD WALL WITH GYPSUM BOARD TO DECK AND INSULATE WALL 6" ABOVE CEILING, EXTEND OTHER STUD WALL WITH GYPSUM 6" ABOVE CEILING. INSTALL 3 5/8" METAL BRACING HORIZONTALLY BETWEEN STUDS AT 36" O.C. VERTICAL MAX. TOTAL WIDTH OF PLUMBING WALL SHALL BE 1'-6".
- ◇F PLUMBING WALL, 6" METAL x 25 GA. METAL STUDS AT 24" O.C. MAX. WITH 1/2" GYPSUM BOARD EACH SIDE WITH R-11 BATT INSULATION- EXTEND METAL STUD AND 1 LAYER GYPSUM BOARD TO DECK - RETURN GYPSUM BOARD TO WINDOW FRAMES AS REQUIRED
- ◇G 1 HOUR RATED WALL, 6" x 25 GA. METAL STUDS AT 24" O.C. MAX WITH 1/2" TYPE "X" FIRECODE GYPSUM BOARD EACH SIDE WITH 3 1/2" FIRE BATT INSULATION - EXTEND STUDS, GYPSUM BOARD, & INSULATION TO ROOF DECK ABOVE INSTALL FIRE RATED UL APPROVED SEALANT/ CAULKING BETWEEN ROOF DECK AND WALL.
- ◇H DATA ROOM WALL, 3 5/8" x 25 GA. MTL. STUDS AR 24" O.C. MAX WITH 1/2" GYP. BD. AT EXTERIOR SIDE AND 1/2" FIRE RETARDENT TREATED PLYWOOD AT INTERIOR SIDE - EXTEND ENTIRE WALL TO 6" ABOVE CEILING
- ◇J FURRING AT EXTERIOR WALL, 6" x 25 GA. MTL. STUDS AT 24" O.C. MAX WITH 1/2" GYP. BD. 1 SIDE AND R-11 BATT INSULATION - EXTEND ENTIRE WALL TO 6" ABOVE CEILING.
- ◇K 6" X 25 GA. METAL STUDS AT 24" O.C. MAX. WITH 1/2" GYPSUM BOARD EACH SIDE WITH R-11 BATT INSULATION EXTEND METAL STUDS AND 1 SIDE OF GYP. BOARD TO DECK, EXTEND BATT INSULATION AND OTHER SIDE OF GYPSUM BOARD 6" ABOVE CEILING.

REFLECTED CEILING PLAN LEGEND

⊠	2 X 4 RECESSED FLUORESCENT FIXTURE REFERENCE ELECTRICAL
◇	RECESSED INCANDESCENT FIXTURE REFERENCE ELECTRICAL
▭	1 X 4 RECESSED FLUORESCENT FIXTURE REFERENCE ELECTRICAL
EJ-1	EXPANSION JOINT COVER - SERIES XSM-200 BY MM SYSTEMS CORPORATION, COLOR AS SELECTED BY ARCHITECT

KEY NOTES:

1. INSTALL 1/2" GYPSUM BOARD ON EXISTING METAL STUDS - RETURN TO WINDOW FRAME AS REQUIRED
2. 4" RADIUS OUTSIDE CORNER HOLDING STYLE DRHRD 40-400 BY MM SYSTEMS CORPORATION
3. LOW WALL FURNITURE PARTITIONS NOT IN THIS CONTRACT - THIS CONTRACTOR SHALL COORDINATE INSTALLATION AS REQUIRED
4. ACCORDIAN PARTITION, SERIES 4000 BY HUFCOR OR APPROVED EQUAL WITH STC RATING OF 40, TOP SUPPORTED CENTER STACK, MANUAL OPERATION, HEIGHT OF 10'-0", WIDTH OF 18'-0" (FIELD VERIFY) WITH TYPE 16 CLEAR ANODIZED ALUMINUM TRACK, STANDARD ANCHOR POST, & LEAD POST WITH MAGNASEAL JAMB. FINISH SHALL BE DIMENSIONS PASSAGES, GLACIER 42-651.

GENERAL NOTES:

1. ALL WORK SHALL COMPLY WITH APPLICABLE CODES. (CONTRACTOR'S RESPONSIBILITY)
2. ALL OFFICE AND TOILET CEILINGS SHALL HAVE SOUND BATTS AT ENTIRE CEILING TYPICAL UNLESS NOTED OTHERWISE. - REF. WALL TYPES THIS SHEET FOR INSULATION IN WALLS.
3. ALL WALLS ARE DIMENSIONED TO FACE OF GYPSUM BOARD UNLESS NOTED OTHERWISE.
4. PROVIDE SHOP DRAWINGS ON ALL MILLWORK ITEMS.
5. THE CONTRACTOR SHALL VERIFY EXISTING CONDITIONS AND DIMENSION AND NOTIFY ARCHITECT OF ANY CHANGES.
6. ALL COLUMNS SHALL BE FURRED AROUND TIGHT WITH 3 5/8" MTL. STUDS WITH 1/2" GYPSUM BD. EXTEND 6" ABOVE CEILING OR ULTRAWALL (CONTRACTOR'S OPTION).
7. INSTALL 1" MINI-BLINDS AT ALL EXTERIOR WINDOWS - BLINDS TO FIT INSIDE WINDOW FRAME MULLIONS TYPICAL - COLOR AS SELECTED BY ARCHITECT.
8. ALL DOOR OPENINGS ARE LOCATED 6" FROM CORNER OF ADJACENT WALL UNLESS OTHERWISE NOTED
9. RETURN GYPSUM BOARD AT JAMBS AND HEAD OF ALL EXTERIOR WINDOW AND DOOR TYPICAL.

CONTRACTOR SHALL BE RESPONSIBLE FOR PROVIDING NECESSARY DRAWINGS FOR HVAC AND PLUMBING REQUIREMENTS, SIGNED & SEALED BY A LICENSED ENGINEER IN THE STATE OF TENNESSEE, TO SATISFY ALL STATE AND LOCAL CODES.

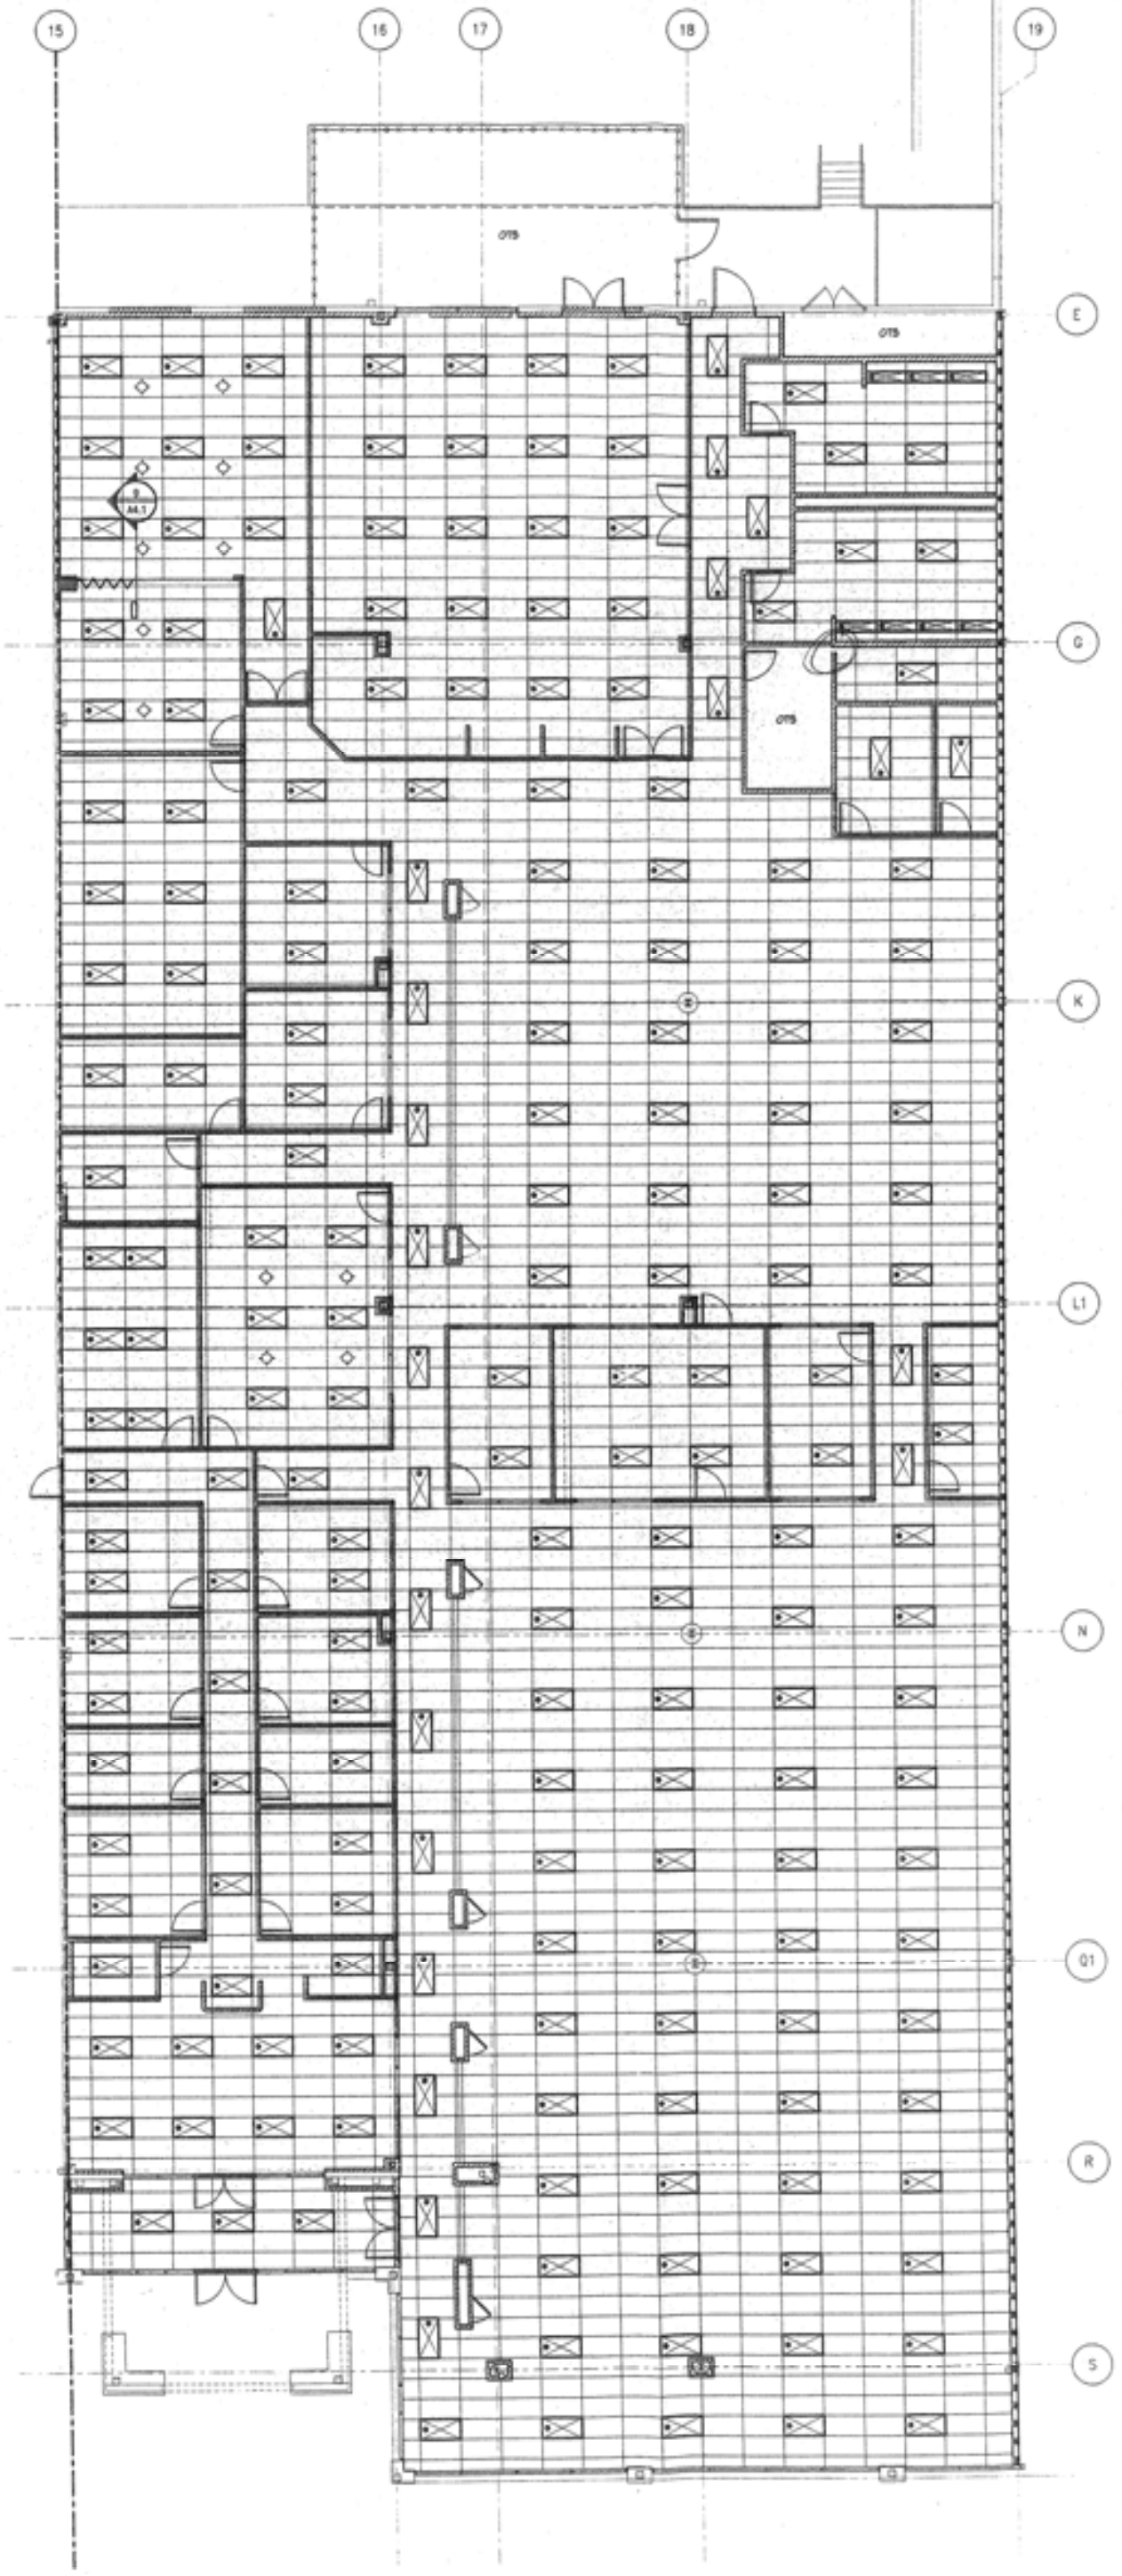

1 REFLECTED CEILING PLAN

1/8" = 1'-0"

JACKSON
BRONSON
& FERACI
ARCHITECTS
& PLANNERS
764 Paragon Drive - Suite 12
Memphis, Tennessee 38132
Voice(901)-332-9335 Fax(901)-332-5554

Revision

SITEL CORPORATION
SYCAMORE SQUARE
1699 SYCAMORE VIEW RD.
MEMPHIS, TN. 38134

Sheet Title FLOOR PLAN AND REFLECTED CEILING PLAN - AREA "B"	
Project No. 9704	Sheet No. A2.2
Drawing File No. 9704A2.2	
Drawn by JDF	
Date 7/14/97	

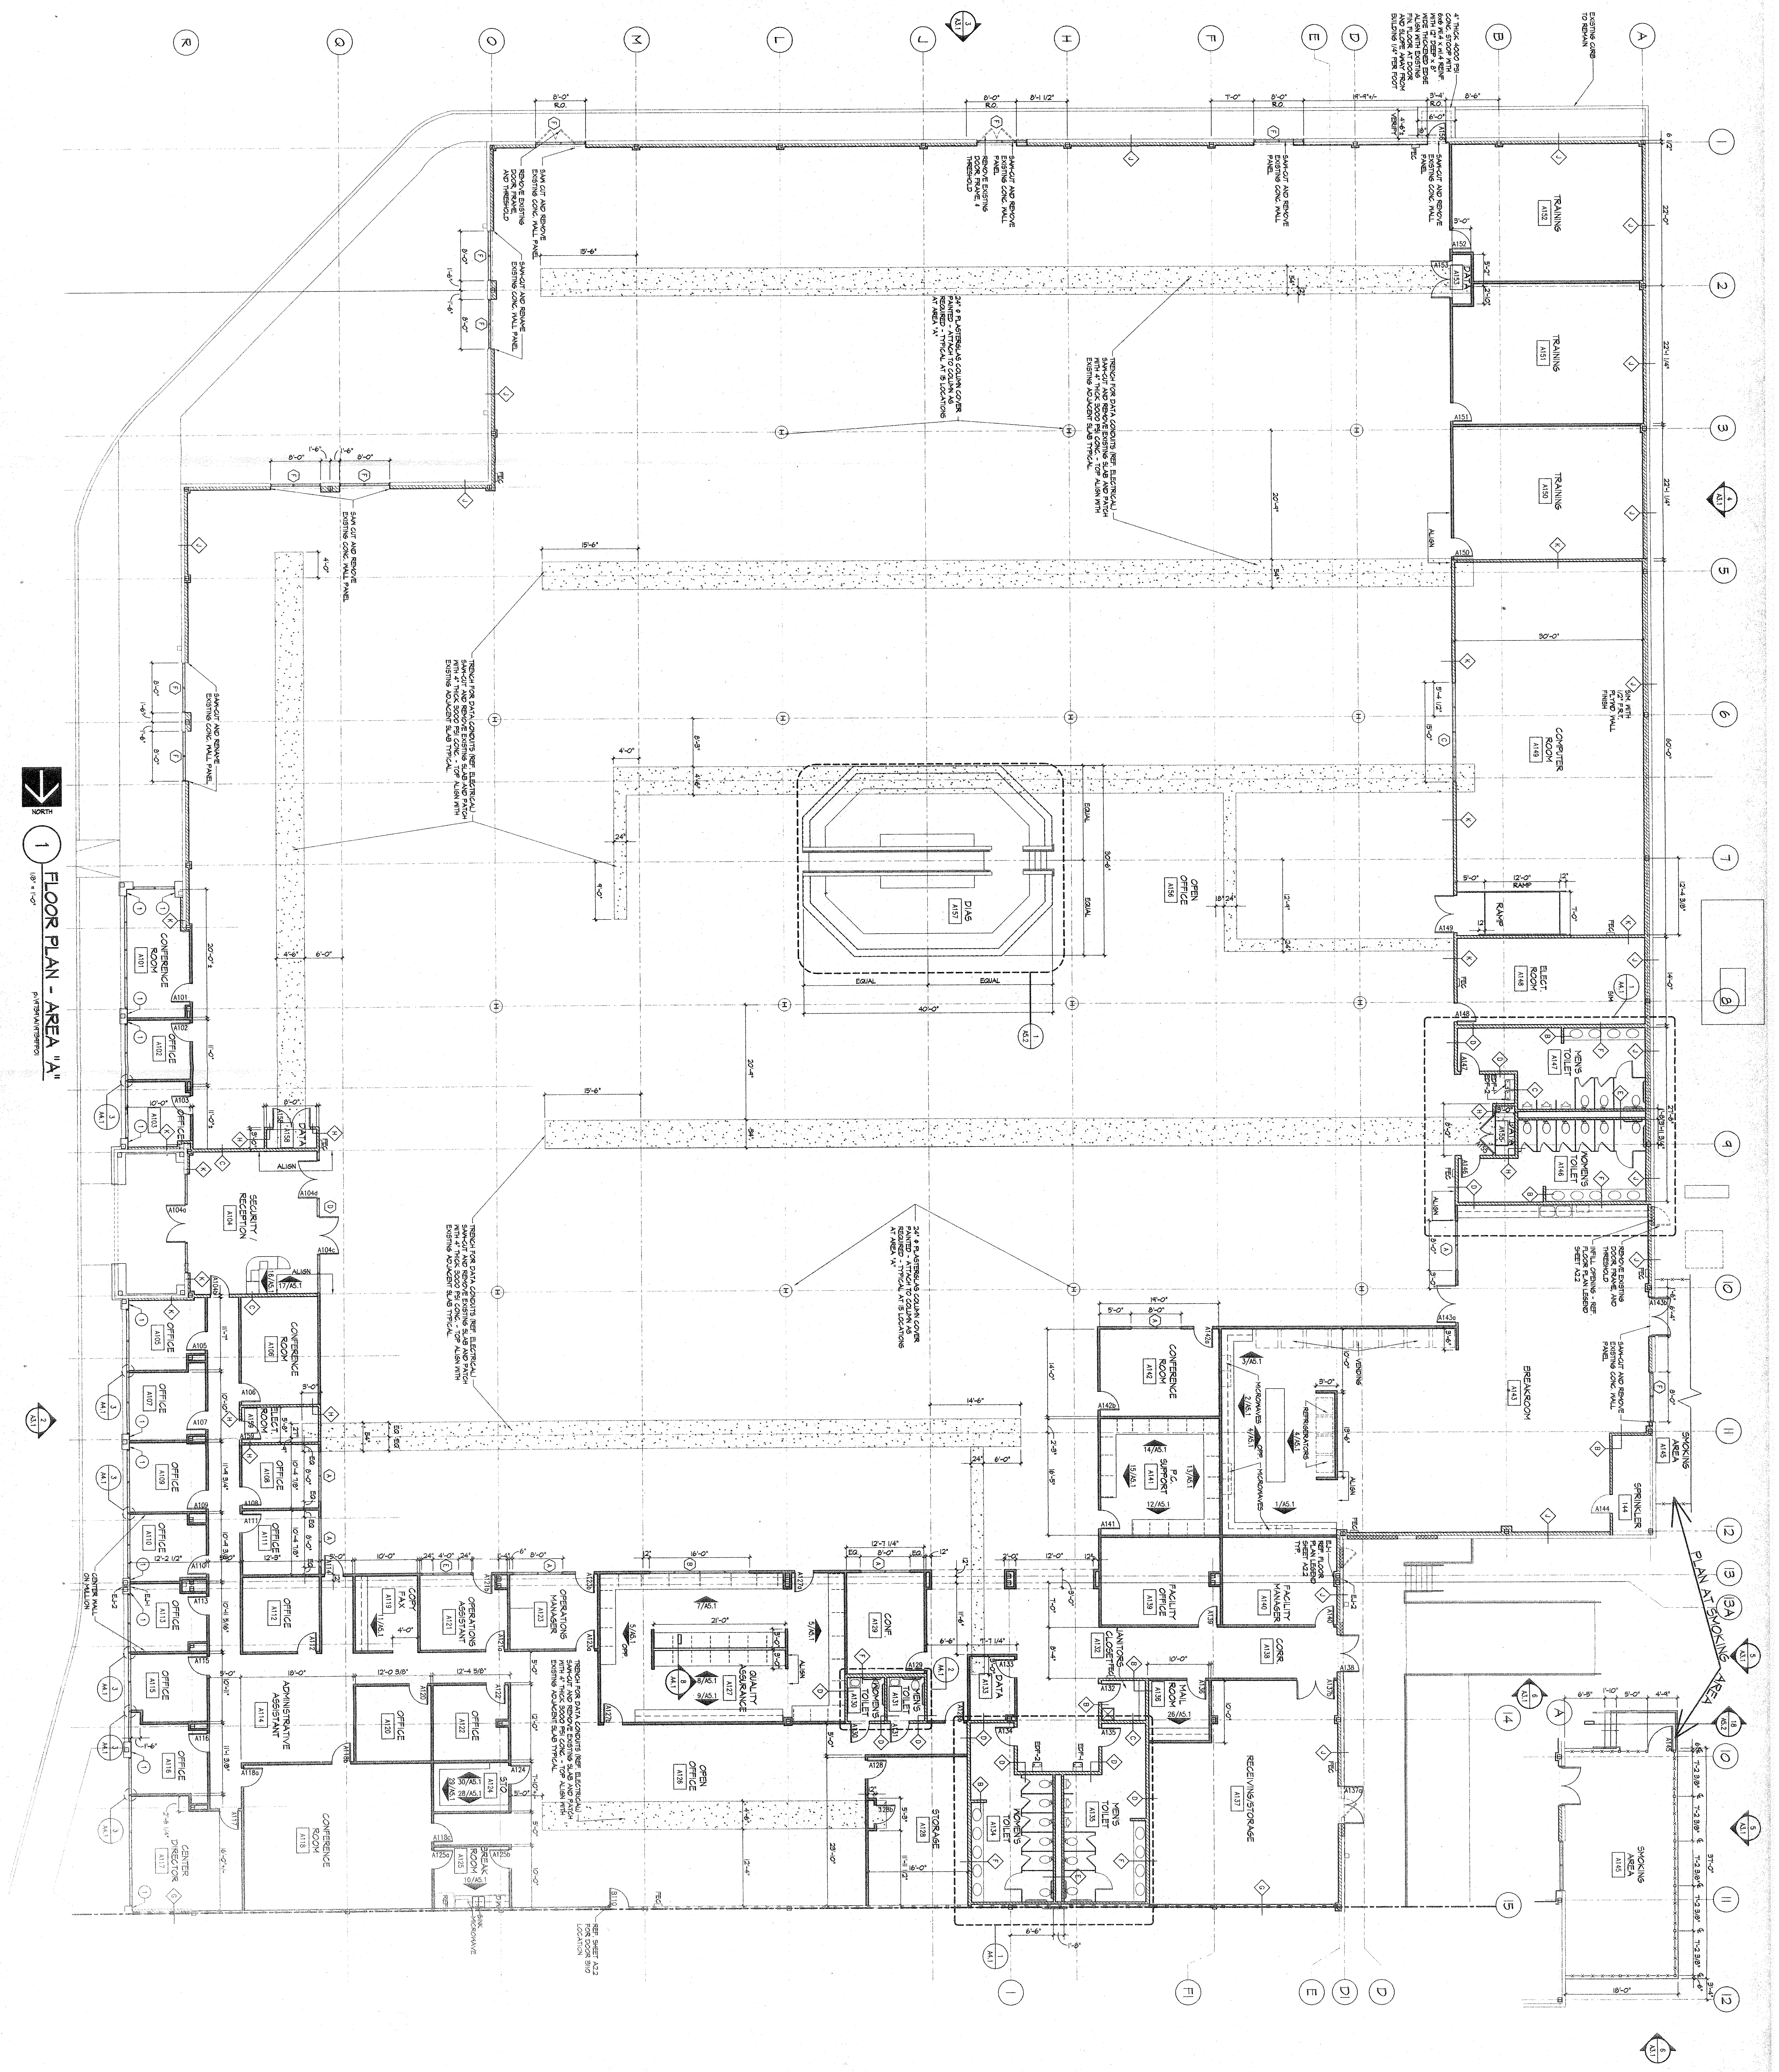

Sheet Title
FLOOR PLAN - AREA "A"
Project No.
9739
Drawing File No.
9739A21
Drawn by
JBF
Date
7/14/97
Sheet No.
A2.1

SITEL CORPORATION
SYCAMORE SQUARE
1699 SYCAMORE VIEW ROAD
MEMPHIS, TN. 38134

Revision

JACKSON BRONSON & FERACI
ARCHITECTS & PLANNERS
1769 Paragon Drive - Suite 112
Memphis, Tennessee 38132
Voice(901)-332-5533 Fax(901)-332-5534